

2nd semester

**INDIAN MARITIME UNIVERSITY**  
(A Central University, Govt. of India)  
B.TECH (MARINE ENGINEERING)  
Dec 2017- END SEMESTER EXAMINATION  
**STRENGTH OF MATERIALS - I (UG11T1204/T2204)**

Time: 3 Hours

Max Marks: 100

Date: 23.12.2017

Pass Marks: 50

---

**Part-A (3x10=30 Marks)**


**Compulsory Questions**

1. a) State the principle of superposition.  
b) Define the term modulus of resilience.  
c) State Hooke's Law clearly.  
d) What is statistically indeterminate structure? Explain with diagram.  
e) Write down the relation between Young's modulus, Bulk modulus and Poisson's ratio.  
f) Define Poisson's ratio. What is the range of the value of Poisson's ratio.  
e) What do you understand by the term, 'point of contraflexure'?  
f) Define Neutral axis in a beam.  
g) Write the assumptions for finding out the shear stress in a circular shaft, subjected to torsion.  
h) Define "Shear Stress".

**Part-B (5x14=70Marks)**


**Answer any five of the followings.**

2. a) Define modulus of elasticity.  
b) Find the expression of deformation of a body to self weight.  
c) A load of 5kN is to be raised with the help of a steel wire. Find the minimum diameter of the steel wire, if the stress is not to exceed 100 Mpa. (2+6+6 = 14)
3. An aluminum bar 3m long and 2500 mm<sup>2</sup> in cross-section is rigidly fixed at A and D as shown in Figure.

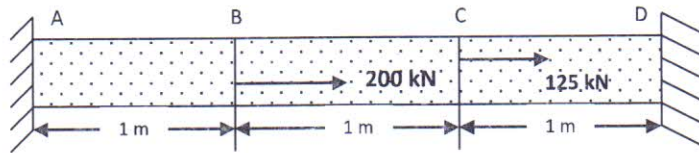

Determine the loads sheared and stresses in each portion and the distances through which the points B and C will move. Take  $E$  for aluminum as 80 GPa. (14)


4. A composite bar made up of aluminum and steel, is held between two supports as shown

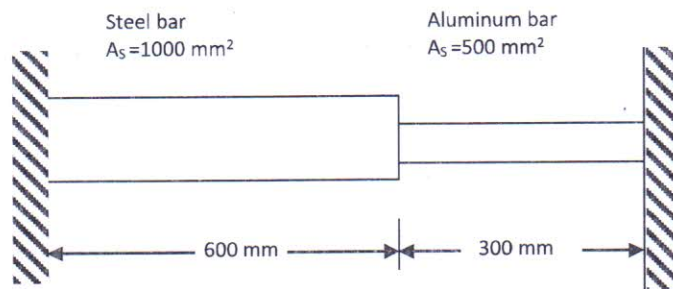


The bars are stress free at a temperature of  $38^\circ\text{C}$ . What will be the stress in the two bars, when the temperature is  $21^\circ\text{C}$ , if (a) the supports are unyielding; (b) the supports come nearer to each other by  $0.1\text{ mm}$ ? (Assume the change of temperature is uniform all along the length of bar)

Take  $E$  for steel as 200 GPa;  $E$  for aluminum as 75 GPa and coefficient of expansion for steel as  $11.7 \times 10^{-6}$  per  $^\circ\text{C}$  and coefficient of expansion for aluminum as  $23.4 \times 10^{-6}$  per  $^\circ\text{C}$ . (14)

5. a) Deduce the relation between Modulus of Elasticity and Modulus of Rigidity.  
 b) A solid steel shaft has to transmit 100 kW at 600 r.p.m. Taking allowable shear stress as 70 MPa, find the suitable diameter of the shaft. The maximum torque transmitted in each revolution exceeds the mean by 20%. (7+7=14)
6. a) Draw the S.D.F (shear force diagram) and B.M.D (bending moment diagram) for a cantiliver beam with uniformly distributed load.  
 b) A simply supported beam AB of span 2.5 m is carrying two point loads as shown in the figure below.






Draw the shear force and bending moment diagram for the beam.

(7+7=14)

7. a) Prove that  $\frac{M}{I} = \frac{\sigma}{y} = \frac{E}{R}$  (all the expressions are as per convention)

b) Figure shows a rolled steel beam of an unsymmetrical I-section.

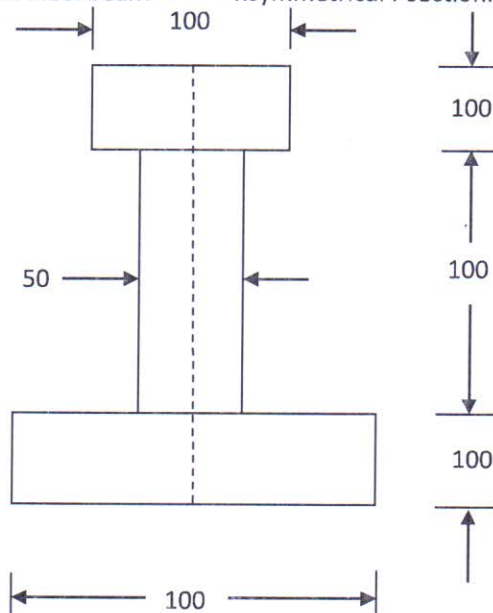

If the maximum bending stress in the beam section is not to exceed 40 MPa, find the moment, which the beam can resist.

(7+7=14)

8. a) Write advantage and disadvantages of welded joints.

b) A cylindrical thin drum 800 mm in diameter and 4 m long is made of 10 mm thick plate. If the drum is subjected to an internal pressure of 2.5 MPa, determine its changes in diameter and length. Take E as 200 GPa and Poisson's ratio as 0.25.

(7+7=14)

\*\*\*\*