


# Control System Toolbox™ Release Notes



# MATLAB®

## How to Contact MathWorks

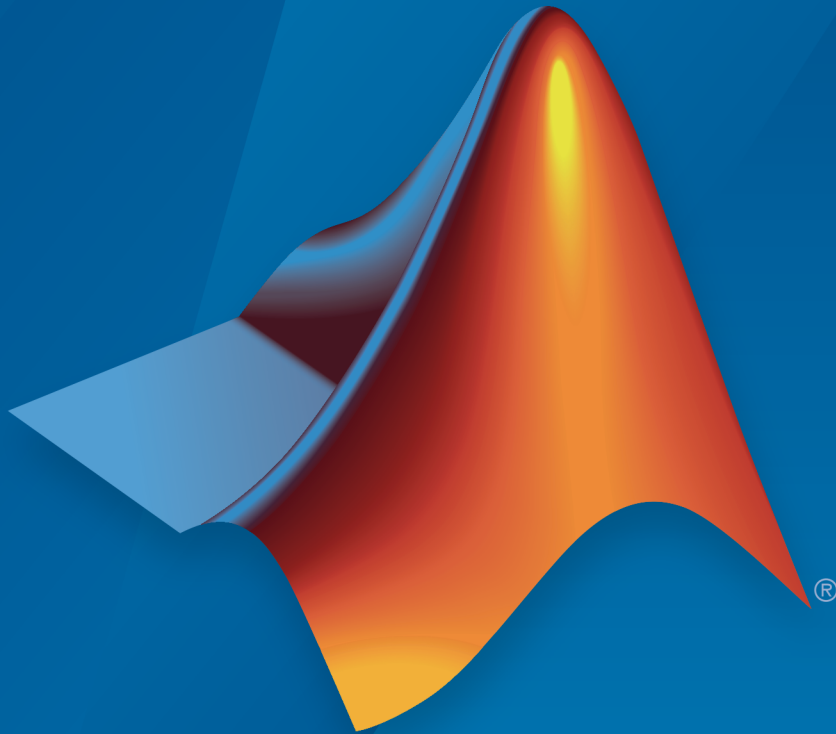

Latest news: [www.mathworks.com](http://www.mathworks.com)  
Sales and services: [www.mathworks.com/sales\\_and\\_services](http://www.mathworks.com/sales_and_services)  
User community: [www.mathworks.com/matlabcentral](http://www.mathworks.com/matlabcentral)  
Technical support: [www.mathworks.com/support/contact\\_us](http://www.mathworks.com/support/contact_us)



Phone: 508-647-7000



The MathWorks, Inc.  
3 Apple Hill Drive  
Natick, MA 01760-2098

### *Control System Toolbox™ Release Notes*

© COPYRIGHT 2002–2017 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

**FEDERAL ACQUISITION:** This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

### **Trademarks**

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See [www.mathworks.com/trademarks](http://www.mathworks.com/trademarks) for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

### **Patents**

MathWorks products are protected by one or more U.S. patents. Please see [www.mathworks.com/patents](http://www.mathworks.com/patents) for more information.

## R2017a

---

<b>Extended and Unscented Kalman Filter Simulink Blocks: Estimate states of nonlinear systems</b> .....	1-2
<b>New properties of generalized state-space models and matrices</b> .....	1-2
<b>Discrete-time frequency-dependent specifications for tuning goals</b> .....	1-3
<b>Regularization of tuning goals for improved numeric stability</b> .....	1-3
<b>Maximum Natural Frequency Option in Control System Tuner: Prevent poles and zeros from going to infinity</b> ...	1-3
<b>Scaling information passed automatically to <code>viewSpec</code> and <code>evalSpec</code></b> .....	1-4
<b>Functionality being removed or changed</b> .....	1-4

## R2016b

---

<b>Conic Sector Tuning Goal: Tune control systems to enforce fixed or frequency-dependent sector bounds</b> .....	2-2
<b>Improved Passivity Tuning Goal: Set output passivity index to a negative value</b> .....	2-2

<b>MaxRadius Option for Tuning: Prevent poles and zeros from going to infinity</b> .....	2-2
<b>Improved getSectorIndex and sectorplot Functions:</b> <b>Compute and plot sector index for unstable systems</b> .....	2-3
<b>Extended and Unscented Kalman Filters: Estimate states of nonlinear systems</b> .....	2-3
<b>Phase-Wrap Branch Option: Specify cutoff point for wrapping phase in response plots</b> .....	2-3

## R2016a

<b>Redesigned Control System Designer App: Design SISO controllers for feedback systems using improved interactive workflows</b> .....	3-2
<b>Control System Tuner App and systune Command:</b> <b>Automatically tune single-loop and multiloop control systems to meet design requirements</b> .....	3-3
<b>Model Reducer App: Compute and compare reduced-order models using interactive workflows</b> .....	3-3
<b>Passivity and Conic Sectors: Analyze and tune control systems for passivity and other sector bounds</b> .....	3-4
<b>Limited Balanced Truncation: Reduce model order according to energies within time-domain and frequency-domain intervals</b> .....	3-5
<b>sampleBlock and rsampleBlock commands for sampling generalized models</b> .....	3-6
<b>Spectral factorization of LTI models</b> .....	3-6
<b>Renamed tunable control design blocks</b> .....	3-6

Functionality being removed or changed .....	3-7
--	-----

## R2015b

<b>pid2 and pidstd2 Model Objects: Represent, analyze, and use 2-DOF PID controllers for control design .....</b>	<b>4-2</b>
<b>2-DOF PID Controller Tuning: Automatically tune the gains of 2-DOF PID controllers with PID Tuner app and pidtune command .....</b>	<b>4-2</b>
<b>Save Current Controller Design as Baseline in PID Tuner ..</b>	<b>4-3</b>
<b>Change in LPV System block default values for model delays .....</b>	<b>4-4</b>
<b>Analysis Plots Wrap Phase in Interval [0°,360°) .....</b>	<b>4-5</b>

## R2015a

<b>Improved input disturbance rejection with the PID tuning algorithm .....</b>	<b>5-2</b>
<b>Option to specify code generation settings in LPV System block .....</b>	<b>5-3</b>
<b>connect command syntax for specifying analysis point locations .....</b>	<b>5-3</b>
<b>LTI Viewer renamed to Linear System Analyzer .....</b>	<b>5-4</b>
<b>sisotool function renamed to controlSystemDesigner ...</b>	<b>5-5</b>
<b>getBlockValue returns all block values in structure .....</b>	<b>5-5</b>

<b>Functionality being removed or changed</b> .....	<b>5-6</b>
---	------------

## **R2014b**

<b>LPV System block for modeling and simulating linear parameter-varying systems</b> .....	<b>6-2</b>
<b>Kalman Filter block for estimating states of linear time-invariant and linear time-varying systems</b> .....	<b>6-3</b>
<b>AnalysisPoint Control Design Block for Marking Points of Interest for Linear Analysis</b> .....	<b>6-3</b>
<b>pidtool function renamed to pidTuner</b> .....	<b>6-4</b>
<b>getSwitches function renamed to getPoints</b> .....	<b>6-5</b>
<b>Functionality being removed or changed</b> .....	<b>6-5</b>

## **R2014a**

<b>Redesigned PID Tuner app for improved PID tuning workflow</b> .....	<b>7-2</b>
<b>PID controller tuning using system identification to model the plant from measured input-output data in the PID Tuner app (with System Identification Toolbox)</b> .....	<b>7-2</b>
<b>freqsep function for decomposing a linear system into fast dynamics and slow dynamics</b> .....	<b>7-2</b>
<b>damp command display includes time constant information</b>	<b>7-3</b>

## R2013b

<b>SamplingGrid</b> property for tracking dependence of array of sampled models on variable values .....	8-2
<b>Option to retain unconnected states when interconnecting models using <code>connect</code> command</b> .....	8-2
<b><code>connect</code> command always returns state-space or frequency response data model</b> .....	8-3
<b><code>updateSystem</code> command for updating dynamic system data in a response plot</b> .....	8-3
<b><code>getLoopID</code> renamed to <code>getSwitches</code></b> .....	8-3
<b><code>LoopID</code> property of <code>loopswitch</code> renamed to <code>Location</code></b> .....	8-4

## R2013a

<b>Transient behavior slider for PID Tuner, increasing control over reference tracking and disturbance rejection performance</b> .....	9-2
--	-----

## R2012b

<b><code>ltiblock.pid2</code> and <code>loopswitch</code> objects for tuning two-degree-of-freedom PID controllers and marking loop opening sites for open-loop requirements</b> .....	10-2
<b>Commands for obtaining open-loop responses, closed-loop responses, and current values of tunable components from control system models</b> .....	10-2

<b>Option for elementwise operation of model query commands on model arrays .....</b>	<b>10-3</b>
---	-------------

**R2012a**

<b>Frequency Analysis Commands for Calculating Peak Gain and Finding Gain-Crossover Frequencies .....</b>	<b>11-2</b>
<b>Specify Target Crossover Frequency as Input to pidtune .</b>	<b>11-2</b>
<b>Rescaled Impulse Response and Impulse-Invariant Time Domain Conversion .....</b>	<b>11-2</b>
<b>First-Order Hold Method for d2c .....</b>	<b>11-3</b>
<b>tzzero Computes Invariant Zeros and Transmission Zeros .</b>	<b>11-3</b>
<b>Models Created With System Identification Toolbox Can Be Used Directly With Control System Toolbox Functions .</b>	<b>11-3</b>
<b>Functionality Being Removed or Changed .....</b>	<b>11-4</b>

**R2011b**

<b>Formula-Based Specification of Summing Junctions and Vector Signal Naming for sumblk and connect .....</b>	<b>12-2</b>
<b>Commands for Interacting with Control Design Blocks in Generalized LTI Models .....</b>	<b>12-2</b>
<b>Functionality Being Removed or Changed .....</b>	<b>12-2</b>



<b>New Model Objects for Representing Tunable Parameters and Systems with Tunable Components</b> .....	<b>13-2</b>
<b>New Time and Frequency Units for Models and Response Plots</b> .....	<b>13-3</b>
<b>Discrete-Time PID Controller Objects Have Stable Derivative Filter Pole</b> .....	<b>13-4</b>
<b>New Variable <math>q^{-1}</math> for Expressing Discrete-Time Transfer Functions</b> .....	<b>13-4</b>

<b>New Commands and GUI for Modeling and Tuning PID Controllers</b> .....	<b>14-2</b>
PID Controller Design with the New PID Tuner GUI .....	<b>14-2</b>
PID Controller Design with the New pidtune Command ...	<b>14-2</b>
Modeling PID Controllers in Parallel Form or Standard Form .....	<b>14-3</b>
<b>Improved PID Tuning Options in SISO Design Tool</b> .....	<b>14-3</b>
<b>Ability to Analyze a Controller Design for Multiple Models Simultaneously in SISO Design Tool</b> .....	<b>14-3</b>
<b>Change in Output of repsys Command</b> .....	<b>14-4</b>

## R2010a

<b>Enhanced c2d Command to Approximate Fractional Time Delays in Tustin and Matched Discretization Methods . .</b>	<b>15-2</b>
<b>New Commands for Specifying Options for Continuous-Discrete Conversions . . . . .</b>	<b>15-2</b>
<b>New FDEL Command to Remove Specified Data from Frequency Response Data (FRD) Models . . . . .</b>	<b>15-2</b>

## R2009b

<b>Ability to Design Compensators for New Types of Plants . .</b>	<b>16-2</b>
<b>New Automated PID Tuning Method . . . . .</b>	<b>16-2</b>

## R2009a

<b>Variable q Now Defined as the Forward Shift Operator z .</b>	<b>17-2</b>
---	-------------

## R2008b

<b>New Design Tools for Linear-Quadratic-Gaussian (LQG) Servo Controllers with Integral Action . . . . .</b>	<b>18-2</b>
Current Flag Moved from lqgreg to kalman . . . . .	18-2
<b>New Upsampling Method for Rate Conversion in Discrete-Time Models . . . . .</b>	<b>18-2</b>

<b>New Scaling Tools to Enhance the Accuracy of Computations with State-Space Models</b> .....	<b>18-3</b>
<b>New Command to Reorder the States of State-Space Models</b> .....	<b>18-3</b>
<b>Enhanced Support for Customizing Response Plots</b> .....	<b>18-3</b>

**R2008a**

<b>Updated Error and Warning Message System</b> .....	<b>19-2</b>
---	-------------

**R2007b**

<b>Updated and Expanded Demos</b> .....	<b>20-2</b>
---	-------------

**R2007a**

<b>Analysis of Time Delay Systems Now Fully Supported</b> ....	<b>21-2</b>
<b>New and Updated Automated Tuning Methods</b> .....	<b>21-2</b>
<b>New Tustin and Prewarp Options for d2d Function</b> .....	<b>21-2</b>

**R2006b**

<b>New Loop Configurations in the SISO Design Tool</b> .....	<b>22-2</b>
--	-------------

<b>New Design Requirements</b> .....	<b>22-2</b>
--------------------------------------	-------------

**R2006a**

<b>SISO Design Tool</b> .....	<b>23-2</b>
Compensator Optimization Is Now Supported .....	<b>23-2</b>
Improved Compensator Editor .....	<b>23-2</b>
Multi-Loop Compensator Design Support .....	<b>23-2</b>
SISO Design Tool Fully Integrated with the Controls & Estimation Tools Manager .....	<b>23-2</b>
<b>LTI Viewer Enhancements</b> .....	<b>23-3</b>
<b>LTI Objects</b> .....	<b>23-3</b>
Descriptor and Improper State-Space Models Fully Supported .....	<b>23-3</b>
New Commands to Calculate Time Response Metrics .....	<b>23-3</b>
Simplified System Interconnections Using I/O Channel Names .....	<b>23-3</b>
Changes in the Representation of I/O Delays in State-Space Models .....	<b>23-3</b>
New Name Property for LTI Objects .....	<b>23-4</b>
New Commands and Operations for LTI Objects .....	<b>23-4</b>
<b>Numerical Algorithms</b> .....	<b>23-4</b>

**R14SP3**

**No New Features or Changes**

---

<b>Command-Line API for Customizing Plots . . . . .</b>	<b>25-2</b>
<b>Constraint Types for SISO Design . . . . .</b>	<b>25-2</b>
<b>Bode and Nichols Plots Have Additional Options . . . . .</b>	<b>25-2</b>
<b>Model-Approximation and Order-Reduction Commands . .</b>	<b>25-2</b>



# R2017a

**Version: 10.2**

**New Features**

**Bug Fixes**

**Compatibility Considerations**

## Extended and Unscented Kalman Filter Simulink Blocks: Estimate states of nonlinear systems

You can now use the Extended Kalman Filter and Unscented Kalman Filter blocks to estimate the states of a discrete-time nonlinear system in Simulink®. The blocks use first-order extended and unscented Kalman filter algorithms to estimate states as new data becomes available during the operation of the system. Previously, nonlinear state estimation using these algorithms was available at the command line only. You can use the state estimates for state-feedback controllers and for applications such as condition monitoring and fault detection. You can also generate C/C++ code for these blocks using Simulink Coder™ software.

For information about how to use these blocks, see the Extended Kalman Filter and Unscented Kalman Filter block reference pages. For examples, see “Estimate States of Nonlinear System with Multiple, Multirate Sensors” and “Nonlinear State Estimation of a Degrading Battery System”.

## New properties of generalized state-space models and matrices

The generalized state-space model object, `genss`, has the following new properties:

- `StateName` and `StateUnit` — Track the state names and state units of the fixed LTI components and control design blocks that make up the model. When you build a `genss` model from fixed and tunable LTI components, it inherits the `StateName` and `StateUnit` values from these components
- `A`, `B`, `C`, `D`, and `E` — Access the state-space matrices of a `genss` model. These properties model the dependency of the state-space matrices on static control design blocks, such as `realp`, `ureal`, `ucomplex`, or `ucomplexm`.

For more information and examples, see the `genss` reference page.

Additionally, the generalized matrix object, `genmat`, now has a `Name` property. Use the property to assign a name to the generalized matrix. When you convert a static control design block such as `tunableSurface` to a generalized matrix using `genmat(blk)`, the `Name` property of the block is preserved.



---

## Discrete-time frequency-dependent specifications for tuning goals

You can now use discrete-time LTI models to specify frequency-dependent gain profiles for tuning in discrete time. Tuning goals that you can now specify in discrete time include:

- Frequency-dependent minimum gains, maximum gains, and loop gains.
- Frequency-dependent rejection, sensitivity, or error profiles.
- Frequency-dependent weighting functions.

If you specify the gain profile in continuous time for tuning in discrete time, the tuning software discretizes the profile. Specifying the gain profile in discrete time gives you more control over the gain profile near the Nyquist frequency. For more information, see the documentation for the individual tuning goals.

## Regularization of tuning goals for improved numeric stability

When you use a tuning goal with a frequency-dependent specification, the tuning algorithm uses a frequency-weighting function to compute the normalized value of the tuning goal. This weighting function is derived from the gain profile that you specify. For numeric stability and tractability, the software now adjusts the specified gain profile when necessary to eliminate undesirable low-frequency or high-frequency dynamics or asymptotes. This adjustment process is called *regularization*.

The regularized gain profile is displayed on tuning-goal plots generated with `viewSpec` or in Control System Tuner. For affected tuning goals, the `getWeight` or `getWeights` command extracts the regularized frequency-weighting functions. For more information about regularization, see “Visualize Tuning Goals” and the documentation for the individual tuning goals.

Also, the conic sector goal has a new `Regularization` property that allows you to specify a nonzero regularization parameter. This property is useful when other tuning goals tend to make the sector bound ill-conditioned at some frequencies. For more information, see `TuningGoal.ConicSector`.

## Maximum Natural Frequency Option in Control System Tuner: Prevent poles and zeros from going to infinity

Most tuning goals in the **Control System Tuner** app include implicit stability or minimum-phase constraints. The new **Maximum natural frequency** tuning option

constrains the maximum natural frequency of the corresponding stabilized poles and zeros. This option is useful to prevent poles and zeros from going to infinity as a result of algebraic loops becoming singular or control effort growing unbounded. To access the option in the app, on the **Tuning** tab, click **Tuning Options**.

For more information about stabilized poles and zeros, see the documentation for each tuning goal, listed on the “Tuning Goals” page.

The new option is equivalent to the `MaxRadius` option of `systuneOptions`, introduced in R2016b for command-line tuning.

## Scaling information passed automatically to `viewSpec` and `evalSpec`

When you use `systune` to tune a MIMO feedback loop, some tuning goals are sensitive to the relative scaling of each SISO loop. `systune` tries to balance the overall loop-transfer matrix while enforcing such goals. The optimal loop scaling is now stored in the tuned closed-loop model returned by `systune`. When you pass the tuned model to `viewSpec` or `evalSpec` to examine tuning results, these functions take this scaling into account. Previously, you had to pass the `info` output of `systune` to these functions to ensure consistent scaling.

For more information, see `viewSpec` or `evalSpec`.

## Compatibility Considerations

You no longer need to use the syntaxes `viewSpec(Req,CL,info)` and `evalSpec(Req,CL,info)` to ensure consistent scaling. The syntaxes `viewSpec(Req,CL)` and `evalSpec(Req,CL)` obtain any necessary scaling information from the closed-loop model `CL` returned by `systune`. To force the functions to disregard scaling information, use `viewSpec(Req,CL,[])` or `evalSpec(Req,CL,[])`.

## Functionality being removed or changed

Functionality	Result	Use This Instead	Compatibility Considerations
Q property of <code>TuningGoal.ConicSector</code>	Still works	<code>SectorMatrix</code>	If you have scripts or functions that refer to the Q property of a <code>TuningGoal.ConicSector</code> object, update them to use the new property name <code>SectorMatrix</code> .

---

Functionality	Result	Use This Instead	Compatibility Considerations
<ul style="list-style-type: none"> <li>• <code>viewSpec(Req,CL,info)</code></li> <li>• <code>evalSpec(Req,CL,info)</code></li> </ul>	Still works	<ul style="list-style-type: none"> <li>• <code>viewSpec(Req,CL)</code></li> <li>• <code>evalSpec(Req,CL)</code></li> </ul>	<p>If you have scripts or functions that use the <code>info</code> argument, consider updating them to remove the argument. See “Scaling information passed automatically to <code>viewSpec</code> and <code>evalSpec</code>” on page 1-4.</p>



# R2016b

**Version: 10.1**

**New Features**

**Bug Fixes**

## **Conic Sector Tuning Goal: Tune control systems to enforce fixed or frequency-dependent sector bounds**

A *conic system* is a system whose trajectories lie in a given conic sector of I/O space. In some control applications, it is useful to restrict system trajectories to a particular sector. Such bounds arise, for example, in robust control of feedback loops with static nonlinearities. New goals for control system tuning let you impose conic sector bounds on responses of the tuned system.

- Use `TuningGoal.ConicSector` for tuning at the command line with `systemtune`.
- Use Conic Sector Goal for tuning in Control System Tuner.

For more information about conic systems, see [About Sector Bounds and Sector Indices](#).

## **Improved Passivity Tuning Goal: Set output passivity index to a negative value**

You can now specify a negative output passivity index when tuning a control system using `systemtune` or Control System Tuner. Specifying a negative output passivity index for a particular response lets the tuned response have a shortage of passivity at the output. Negative output passivity index values are permitted in:

- `TuningGoal.Passivity` and `TuningGoal.WeightedPassivity`, for tuning at the command line with `systemtune`.
- Passivity Goal and Weighted Passivity Goal, for tuning with Control System Tuner.

Previously, you could specify a negative or positive input passivity index with these tuning goals, but only a positive output passivity index.

For more information about passivity indices, see [About Passivity and Passivity Indices](#).

## **MaxRadius Option for Tuning: Prevent poles and zeros from going to infinity**

Most tuning goals used for control system tuning with `systemtune` include implicit stability or minimum-phase constraints. The new `MaxRadius` option of `systemtuneOptions` constrains the maximum natural frequency of the corresponding stabilized poles and zeros. This option is useful to prevent poles and zeros from going to infinity as a result

---

of algebraic loops becoming singular or control effort growing unbounded. For more information, see the `systuneOptions` reference page and the reference pages for each tuning goal.

## Improved `getSectorIndex` and `sectorplot` Functions: Compute and plot sector index for unstable systems

You can now use `getSectorIndex` and `sectorplot` to analyze the sector index for both stable and unstable systems. Previously, providing an unstable system as input to either of these functions generated an error.

## Extended and Unscented Kalman Filters: Estimate states of nonlinear systems

You can now estimate the states of discrete-time nonlinear systems at the command line using first-order extended Kalman filter algorithms and unscented Kalman filter algorithms. The new state estimation commands `extendedKalmanFilter` and `unscentedKalmanFilter` are useful for estimation of states when new data is available during the operation of the system. You can use the state estimates for state-feedback controllers and for applications such as condition monitoring and fault detection. You can use MATLAB® Compiler™ or MATLAB Coder software to deploy the estimators in your application.

For an example of online state estimation, see [Nonlinear State Estimation Using Unscented Kalman Filter](#).

## Phase-Wrap Branch Option: Specify cutoff point for wrapping phase in response plots

By default, response plots that show phase response, such as Bode and Nichols plots, display the exact phase. You can make these plots wrap the phase into the interval  $[-180^\circ, 180^\circ)$  by checking **Wrap Phase** in the plot Property Editor, the Linear System Analyzer Preferences Editor, or the Toolbox Preferences Editor.

In R2016b, checking **Wrap Phase** enables a new **Branch** field that lets you specify the value at which accumulated phase wraps in the response plot. For example, entering 0 causes the plot to wrap the phase into the interval  $[0^\circ, 360^\circ)$ .

At the command line, turn on phase wrapping by setting the `PhaseWrapping` option of `bodeoptions` or `nicholoptions` to `'on'`. Specify the phase-wrap cutoff point using the new `PhaseWrappingBranch` option.

In R2015b and R2016a, phase-wrapped plots used the interval  $[0^\circ, 360^\circ)$ . Before R2015b, phase-wrapped plots used the interval  $[-180^\circ, 180^\circ)$ .



# R2016a

**Version: 10.0**


**New Features**

**Bug Fixes**

**Compatibility Considerations**

## Redesigned Control System Designer App: Design SISO controllers for feedback systems using improved interactive workflows

The redesigned **Control System Designer** app streamlines workflows for designing SISO controllers for feedback control systems using graphical and automated tuning methods.

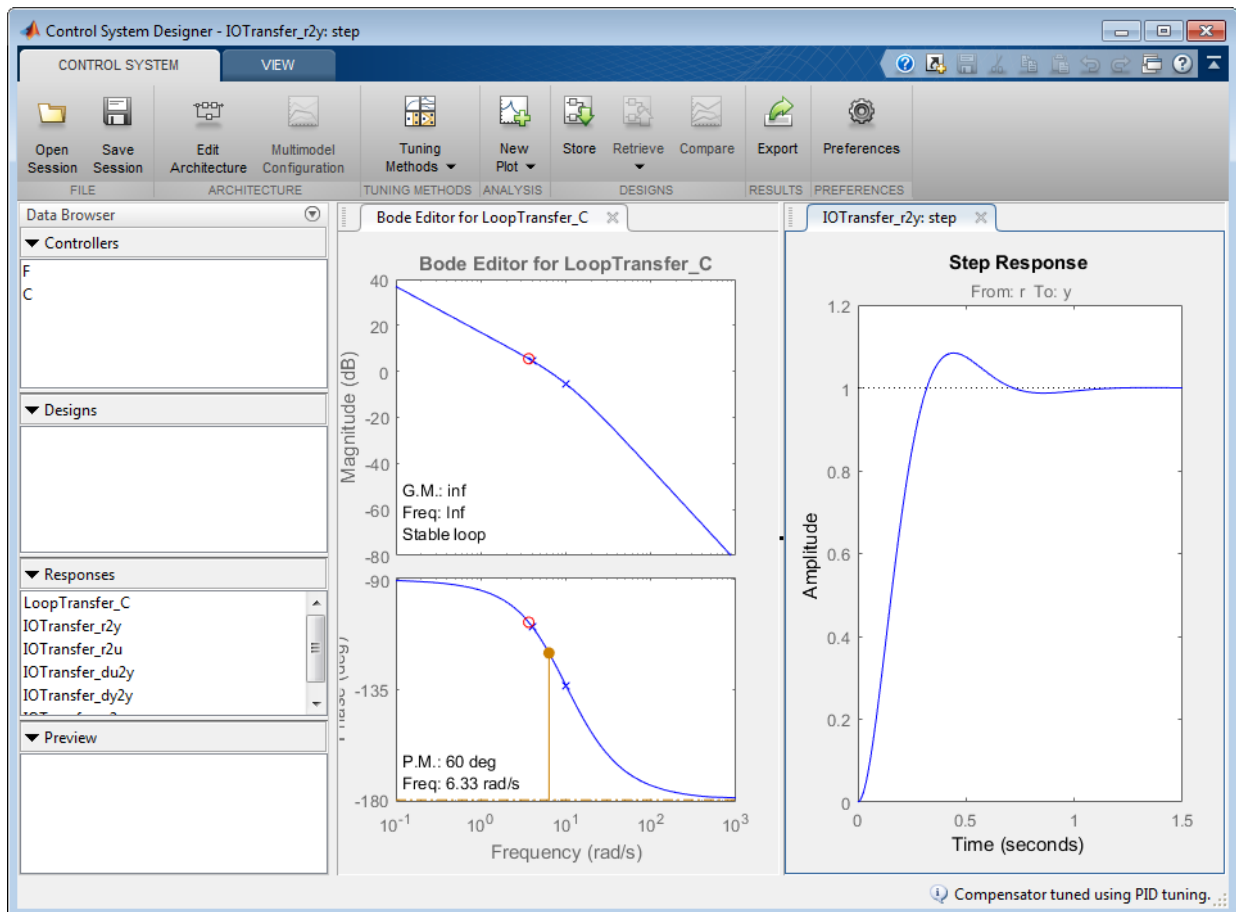

For more information on using **Control System Designer**, see:

- [Control System Designer](#)

- 
- Control System Designer Tuning Methods
  - Bode Diagram Design
  - Design Compensator Using Automated Tuning Methods
  - Analyze Designs Using Response Plots

## **Control System Tuner App and `systemtune` Command: Automatically tune single-loop and multiloop control systems to meet design requirements**

Control System Toolbox™ now includes automatic tuning tools that previously required a Robust Control Toolbox™ license. Control System Tuner and the `systemtune` command automatically tune control systems from high-level design goals you specify, such as reference tracking, disturbance rejection, and stability margins.

To tune a control system, you specify the tunable elements of your control system. You then capture your design requirements using the library of tuning goals. The software jointly tunes all the free parameters of your control system regardless of architecture, number of feedback loops, or whether it is modeled in MATLAB or Simulink. (Tuning control systems modeled in Simulink requires a Simulink Control Design™ license.)

For information about using these tools, see:

- Tuning with Control System Tuner
- Programmatic Tuning

You can also use the `systemtune` command to tune gain-scheduled controllers for control systems in which plant dynamics change with operating conditions or time. For more information, see Gain Scheduling.

## **Model Reducer App: Compute and compare reduced-order models using interactive workflows**

The new **Model Reducer** app is an interactive tool for computing reduced-order approximations of high-order models. Working with lower-order models can simplify analysis and control design. Simpler models are also easier to understand and manipulate. You can reduce a plant model to focus on relevant dynamics before designing a controller for the plant. Or, you can use model reduction to simplify a full-order controller. Using any of the following model-reduction methods, **Model Reducer** helps you reduce model order while preserving model characteristics that are important to your application:

- **Balanced Truncation** — Remove states with low energy contributions.
- **Pole/Zero Simplification** — Eliminate canceling or near-canceling pole-zero pairs.
- **Mode Selection** — Select modes by specifying a region of interest in the complex plane.

**Model Reducer** also provides response plots and error plots to help ensure that the reduced-order model preserves important dynamics.

For an example showing how to use **Model Reducer**, see [Reduce Model Order Using the Model Reducer App](#). For more information about model reduction generally, see [Model Reduction Basics](#).

## Passivity and Conic Sectors: Analyze and tune control systems for passivity and other sector bounds

A linear system is *passive* when it cannot produce energy on its own and can only dissipate the energy initially stored in it. More generally, an I/O map is passive if, on average, increasing the output requires increasing the input. Passive control is often part of the safety requirements in process control, tele-operation, human-machine interfaces, and system networks.

Use the following new commands to analyze the passivity of linear systems:

- `isPassive` — Check passivity of linear system.
- `getPassiveIndex` — Compute various measures of the excess or shortage of passivity of a linear system.
- `passiveplot` — Calculate and plot passivity index as a function of frequency.

Mathematically, a system is passive when all its I/O trajectories are restricted to a particular sector of the I/O space. More generally, a *conic system* is a system whose trajectories lie in a given conic sector. Conic sector bounds arise, for example, in robust control of feedback loops with static nonlinearities. The following new commands let you analyze how well a linear system lies within any conic sector.

- `getSectorIndex` — Check whether the output trajectories of a linear system lie in a particular conic sector. Compute the relative sector index, a measure of how tightly the trajectories fit within the sector.
- `getSectorCrossover` — Compute the frequencies at which the range of trajectories crosses the sector boundary.

- `sectorplot` — Calculate and plot sector index as a function of frequency.

New tuning goals let you enforce passivity when tuning a control system using Control System Tuner or the `systune` command.

Constraint	Command Line	Control System Tuner
Enforce passivity on specified I/Os in the control system	<code>TuningGoal.Passivity</code>	Passivity Goal
Enforce passivity on specified I/Os with frequency-dependent weighting	<code>TuningGoal.WeightedPassivity</code>	Weighted Passivity Goal

For more background and details about the notions of passivity and sector bounds, see:

- About Passivity and Passivity Indices
- About Sector Bounds and Sector Indices

## Limited Balanced Truncation: Reduce model order according to energies within time-domain and frequency-domain intervals

You can now perform balanced-truncation model reduction and compute Hankel singular values based on state energies calculated within specified time and frequency intervals.

- To perform frequency-limited or time-limited balanced truncation, use `balredOptions` to set the `TimeIntervals` or `FreqIntervals` options for the `balred` command. When you use these options, `balred` determines which states to truncate based on their energy contributions within the specified interval only. For more details, see the reference pages for `balredOptions` and `balred`.
- To compute or plot Hankel singular values for specific time or frequency, use `hsvdOptions` or `hsvoptions` to set the `TimeIntervals` and `FreqIntervals` options for the `hsvd` and `hsvplot` commands, respectively. For more details, see the reference page for `hsvdOptions`.

These operations use the new functionality in the `gram` command that computes time-limited and frequency-limited controllability and observability Gramians. For details, see the reference pages for `gram` and the new `gramOptions` command.

## sampleBlock and rsampleBlock commands for sampling generalized models

The new `sampleBlock` and `rsampleBlock` commands sample Control Design blocks in a generalized model such as a `genss` or `uss` model. You can sample tunable blocks, uncertain blocks, or both. The output is the model array obtained by replacing the sampled blocks by values you specify (`sampleBlock`) or randomized values (`rsampleBlock`). Some uses of these functions include:

- Perform sensitivity analysis by varying tunable parameters randomly or across a grid.
- Study robustness by varying parameters over an uncertainty range.

For more information, see the `sampleBlock` and `rsampleBlock` reference pages.

## Spectral factorization of LTI models

The new `spectralfact` command computes the spectral factorization of LTI models. The spectral factorization of a model  $H$  is:

$$H = G' * S * G,$$

where  $S$  is a symmetric matrix and  $G$  is a square, stable, and minimum-phase system with unit (identity) feedthrough.  $H$  must satisfy  $H = H'$ . For more information, see the `spectralfact` reference page.

## Renamed tunable control design blocks

The tunable control design blocks have been renamed. Starting in R2016a, use the following block names:

Control Design Block	New Name
Tunable gain block	tunableGain
Fixed-order state-space model with tunable coefficients	tunableSS
SISO fixed-order transfer function with tunable coefficients	tunableTF
One-degree-of-freedom PID controller with tunable coefficients	tunablePID

Control Design Block	New Name
Two-degree-of-freedom PID controller with tunable coefficients	tunablePID2

Also, several properties of tunable state-space and tunable transfer function blocks have changed. For more information, see “Functionality being removed or changed” on page 3-7.

The remaining block functionality and properties remain unchanged.

## Compatibility Considerations

If your code uses tunable control design blocks, modify your code to use the new block names. For more information, see “Renamed tunable control design blocks” on page 3-6.

## Functionality being removed or changed

Functionality	Result	Use This Instead	Compatibility Considerations
ltiblock.gain, ltiblock.ss, ltiblock.tf, ltiblock.pid, and ltiblock.pid2	Still works	tunableGain, tunableSS, tunableTF, tunablePID, and tunablePID2 respectively.	For more information, see “Renamed tunable control design blocks” on page 3-6.
a, b, c, d, and e properties of ss and tunableSS models.	Still works	A, B, C, D, and E respectively.	If your code uses any of these properties, consider modifying your code to use the new property names. For more information, see ss.
num, den, and ioDelay properties of tf and tunableTF models.	Still works	Numerator, Denominator, and IODelay respectively.	If your code uses any of these properties, consider modifying your code to use the new property names. For more information, see tf.
z, p, k, and ioDelay properties of zero-pole-gain models	Still works	Z, P, K, and IODelay respectively.	If your code uses any of these properties, consider modifying your code to use the new

Functionality	Result	Use This Instead	Compatibility Considerations
			property names. For more information, see <code>zpk</code> .



# R2015b

**Version: 9.10**

**New Features**

**Bug Fixes**

## **pid2 and pidstd2 Model Objects: Represent, analyze, and use 2-DOF PID controllers for control design**

The new numeric LTI models `pid2` and `pidstd2` are specialized for modeling two-degree-of-freedom (2-DOF) PID controllers. These are analogous to the 1-DOF PID models `pid` and `pidstd`.

Use `pid2` and `pidstd2` to represent a 2-DOF PID controller directly with the PID parameters, expressed in parallel (`pid2`) or standard (`pidstd2`) form. For example, `C2 = pid2(Kp, Ki, Kd, Tf, b, c)` creates a 2-DOF PID controller in parallel form with proportional, integral, and derivative gains  $K_p$ ,  $K_i$ , and  $K_d$ , derivative filter time constant  $T_f$ , and setpoint weights  $b$  and  $c$ . In previous releases, to model a 2-DOF PID controller, you had to derive the controller's equivalent transfer function (or other model), and could not directly store the 2-DOF PID parameters.

The `pid2` and `pidstd2` commands can also convert to PID form any type of LTI object that represents a 2-DOF PID controller.

This release also includes new functions to help you work with 2-DOF PID controllers. These functions include:

- `getComponents` — Extract two SISO control components from a 2-DOF `pid2` or `pidstd2` controller.
- `make1DOF` and `make2DOF` — Convert 1-DOF `pid` and `pidstd` controllers to 2-DOF `pid2` and `pidstd2` controllers, and vice versa.
- `piddata2` and `pidstddata2` — Access parameters of 2-DOF PID controllers.

For more information about working with 2-DOF PID controller objects, see:

- [Two-Degree-of-Freedom PID Controllers](#)
- [pid2 and pidstd2 function reference pages](#)

## **2-DOF PID Controller Tuning: Automatically tune the gains of 2-DOF PID controllers with PID Tuner app and pidtune command**

You can now use `pidtune` and PID Tuner to tune all parameters of a two-degree-of-freedom (2-DOF) PID controller, including the setpoint weights  $b$  and  $c$ . When you call `pidtune` or open the PID Tuner app with a plant, the software automatically tunes all parameters of the block to achieve a balance between performance and robustness. When

---

you use the Response Time and Transient Behavior sliders to adjust that balance, PID Tuner adjusts all parameters, including  $b$  and  $c$  if necessary.


PID Tuner and `pidtune` also include options for tuning 2-DOF PID controllers with fixed setpoint weights, such as I-PD ( $b = 0, c = 0$ ) and P-ID ( $b = 1, c = 0$ ).


For more information, see:

- [Tune 2-DOF PID Controller \(PID Tuner\)](#)
- [Tune 2-DOF PID Controller \(Command Line\)](#)
- [PID Controller Types for Tuning](#)

## Save Current Controller Design as Baseline in PID Tuner

In PID Tuner, you can now make the current controller design the baseline controller at any time. This feature allows to you compare the performance of a PID Tuner controller design to the performance of controllers obtained by further adjustment of the design.

To make the current PID Tuner design the baseline controller, by click the **Export** arrow  and select **Save as Baseline**.

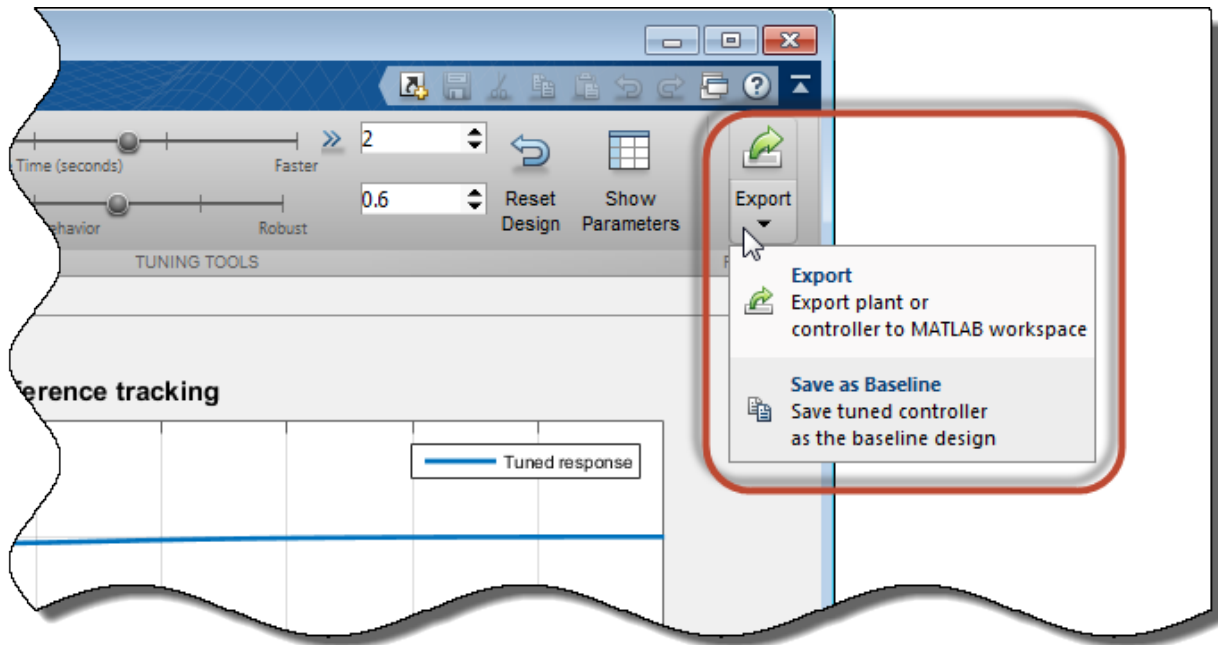

When you do so, the current Tuned response becomes the Baseline response. Further adjustment of the current design creates a new Tuned response line.

Previously, you could only designate a baseline controller when you opened the PID Tuner using the syntax `pidTuner(sys,C0)`.

For more information about analyzing controller performance in PID Tuner, see [Analyze Design in PID Tuner](#).

## Change in LPV System block default values for model delays

The default value is now `false` for **Input delay**, **Output delay**, and **Internal delay**, in the **Fixed Entries** tab of LPV System Block Parameters dialog box. A `false` value means that model delays are treated as free during simulation.

For information about changing the default values, see the [LPV System block reference page](#).

---

## Analysis Plots Wrap Phase in Interval [0°,360°)

By default, response plots that show phase response, such as Bode and Nichols plots, display the exact phase. You can make these plots wrap the phase into the interval [0°,360°) by unchecking **Unwrap Phase** in the plot Property Editor. Previously, unchecking this option caused the plots to wrap the phase into [-180°,180°). The change makes it easier to visualize 180° phase crossings on analysis plots.

The default plot behavior (exact or unwrapped phase) is unchanged. The behavior of commands that return numerical phase response data, such as `bode`, is also unchanged. These commands always return the unwrapped phase.



# R2015a

**Version: 9.9**

**New Features**


**Bug Fixes**

**Compatibility Considerations**

## Improved input disturbance rejection with the PID tuning algorithm

Controller tuning with the PID Tuner app or the `pidtune` command now yields better disturbance rejection by default. For a given target phase margin, the tuning algorithm selects PID coefficients that achieve a balance between reference tracking and input disturbance rejection. If you require more disturbance rejection or better reference tracking than the default algorithm provides, PID Tuner and `pidtune` have a new Design Focus option. Use this option to alter the balance that the tuning algorithm sets between reference tracking and input disturbance rejection. For instance, setting the design focus to reference tracking improves the reference tracking performance of the tuned controller, with some cost to disturbance rejection. Similarly, setting the design focus to input disturbance rejection improves rejection with some cost to reference tracking. Changing design focus is most effective when tuning PID and PIDF controllers, rather than controllers with fewer free parameters, such as PI.

To use the Design Focus option in PID Tuner, click **Options** and select a design focus from the **Focus** menu.

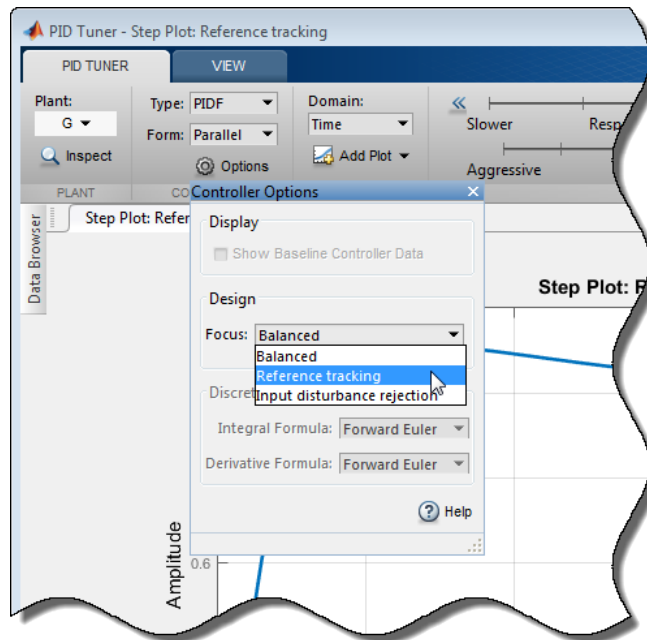



---

You can still use the **Response Time** and **Transient Behavior** sliders to further adjust the balance between reference tracking and input disturbance rejection.

To specify a design focus for command-line tuning with `pidtune`, use `pidtuneOptions` to set the `DesignFocus` option. For example, the following commands design a PIDF controller for the plant `G` with a crossover frequency of 10 rad/s, specifying reference tracking as the design focus.

```
opt = pidtuneOptions('DesignFocus','reference-tracking');  
C = pidtune(G,'pidf',10,opt);
```

For more information about using the design focus option, see:

- Tune PID Controller to Favor Reference Tracking or Disturbance Rejection (PID Tuner)
- Tune PID Controller to Favor Reference Tracking or Disturbance Rejection at Command Line

For more information about using PID Tuner, see [Designing PID Controllers with the PID Tuner](#). For more information about command-line PID tuning, see [PID Controller Design at the Command Line](#).

## Option to specify code generation settings in LPV System block

You can now specify code generation settings in the LPV System block. You specify these settings in the **Code Generation** tab of the block parameters dialog box.

For more information on Linear Parameter-Varying models, see [Linear Parameter-Varying Models](#).

## connect command syntax for specifying analysis point locations


When you interconnect dynamic system models using the `connect` command, you can now specify analysis point locations as an input argument to the command. The following syntax creates a dynamic system model with analysis points by interconnecting multiple models `sys1`, `sys2`, ..., `sysN`:

```
sys = connect(sys1,sys2,...,sysN,inputs,outputs,APs);
```

`inputs` and `outputs` are string vectors that specify the names of the inputs and outputs of the interconnected model. `APs` is a string vector that lists the signal locations at

which to insert analysis points. The software automatically inserts an `AnalysisPoint` block with channels corresponding to these locations. Previously, you had to create `AnalysisPoint` blocks separately and include them in the list of models to connect.

For example, consider the following control system.

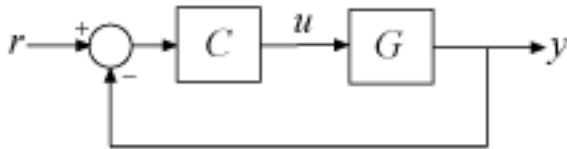

Use `connect` to build this system with an analysis point at the plant input,  $u$ .

```
C.InputName = 'e'; C.OutputName = 'u';
G.InputName = 'u'; G.OutputName = 'y';
Sum = sumblk('e = r-y');
T = connect(G,C,Sum,'r','y','u');
```

These commands return a generalized state-space (`genss`) model with one `AnalysisPoint` block. You can use the analysis point, for example, to extract the open-loop response of the system at  $u$ :

```
L = getLoopTransfer(T,'u',-1);
```

For a more detailed example, see [Mark Analysis Points in Closed-Loop Models](#). For more information about using analysis points in dynamic system models, see the `AnalysisPoint` reference page.

## LTI Viewer renamed to Linear System Analyzer

The LTI Viewer app is now called Linear System Analyzer. The functionality of the app is unchanged.

You can access Linear System Analyzer in two ways:

- From the MATLAB desktop, in the **Apps** tab, in the **Control System Design and Analysis** section, click **Linear System Analyzer**.

- 
- From the MATLAB command line, use the `linearSystemAnalyzer` function. Previously, this function was called `ltiview`. Using `ltiview` to open Linear System Analyzer does not generate an error in this release, but the function might be removed in a future release.

## Compatibility Considerations

If you have scripts or functions that use `ltiview`, consider replacing those calls with `linearSystemAnalyzer`.

## `sisotool` function renamed to `controlSystemDesigner`

The `sisotool` function is now called `controlSystemDesigner`. The `controlSystemDesigner` opens the SISO Design Tool. You can also access SISO Design Tool from MATLAB desktop. In the **Apps** tab, in the **Control System Design and Analysis** section, click **Control System Designer**.

Using `sisotool` to open SISO Design Tool does not generate an error in this release, but the function might be removed in a future release.

## Compatibility Considerations

If you have scripts or functions that use `sisotool`, consider replacing those calls with `controlSystemDesigner`.

## `getBlockValue` returns all block values in structure

A new syntax of the `getBlockValue` command now returns the current values of all Control Design Blocks of a generalized model (`genss`) in a structure. The following syntax returns a structure, `S`, whose field names are the names of the blocks in the `genss` model `M`. The values of the fields are numerical LTI models or numerical values equal to the current values of the corresponding Control Design Blocks.

```
S = getBlockValue(M)
```

This syntax lets you transfer the block values from one generalized model to another model that uses the same Control Design Blocks, as follows:

```
S = getBlockValue(M1);
```

```
setBlockValue(M2,S);
```

For more information, see the `getBlockValue` reference page.

## Compatibility Considerations

Previously, the syntax `getBlockValue(M)` returned the current values of the blocks of `M` as a vector list:

```
[Val1,Val2,...,ValN] = getBlockValue(M)
```

Now, using this syntax causes an error. You can still obtain block values in a list by specifying the block names as input arguments, as follows.

```
[Val1,Val2,...,ValN] = getBlockValue(M,Blkname1,Blkname2,...,BlknameN)
```

## Functionality being removed or changed

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
<code>[Val1,Val2,...] = getBlockValue(M)</code>	Error	<code>S = getBlockValue(M)</code>	<code>getBlockValue(M)</code> now returns a structure containing current values of all blocks. Update scripts and functions that use <code>getBlockValue(M)</code> to use output structure.
<code>ltiview</code> function	Still works	<code>linearSystemAnalyzer</code>	Consider replacing <code>ltiview</code> with <code>linearSystemAnalyzer</code> in scripts and functions.
<code>sisotool</code> function	Still works	<code>controlSystemDesigner</code>	Consider replacing <code>sisotool</code> with <code>controlSystemDesigner</code>

# R2014b

**Version: 9.8**

**New Features**

**Bug Fixes**

**Compatibility Considerations**

## LPV System block for modeling and simulating linear parameter-varying systems

This release introduces the LPV System block. You use this block to represent Linear Parameter Varying (LPV) systems in Simulink.

An LPV system is a linear state-space system whose dynamics vary as a function of certain time-varying parameters called the *scheduling parameters*. Mathematically, an LPV system is represented as:

$$\begin{aligned}dx(t) &= A(p)x(t) + B(p)u(t) \\y(t) &= C(p)x(t) + D(p)u(t) \\x(0) &= x_0\end{aligned}$$

where

- $u(t)$  are the inputs
- $y(t)$  the outputs
- $x(t)$  are the model states with initial value  $x_0$
- $dx(t)$  is the state derivative vector  $\dot{x}$  for continuous-time systems and the state update vector  $x(t + \Delta T)$  for discrete-time systems.  $\Delta T$  is the sample time.
- $A(p)$ ,  $B(p)$ ,  $C(p)$  and  $D(p)$  are the state-space matrices parameterized by the scheduling parameter vector  $p$ .
- The parameters  $p = p(t)$  are measurable functions of the inputs and the states of the model. They can be a scalar quantity or a vector of several parameters. The set of scheduling parameters define the *scheduling space* over which the LPV model is defined.

The linear system can be extended to contain offsets in the system's states, input, and output signals. Mathematically, the LPV system is represented by the following equations:

$$\begin{aligned}dx(t) &= A(p)x(t) + B(p)u(t) + (\overline{dx}(p) - A(p)\overline{x}(p) - B(p)\overline{u}(p)) \\y(t) &= C(p)x(t) + D(p)u(t) + (\overline{y}(p) - C(p)\overline{x}(p) - D(p)\overline{u}(p)) \\x(0) &= x_0\end{aligned}$$

---

$\bar{dx}(p)$ ,  $\bar{x}(p)$ ,  $\bar{u}(p)$ ,  $\bar{y}(p)$  are the offsets in the values of  $dx(t)$ ,  $x(t)$ ,  $u(t)$  and  $y(t)$  at a given parameter value  $p = p(t)$ .

LPV system can be thought of as a first-order approximation of a nonlinear system over a grid of scheduling parameter values. For example, you can linearize a Simulink model between a given input and output ports over a grid of equilibrium operating conditions. The values of the model inputs, outputs and state values at each operating point define the offsets, while the linear state-space models obtained by linearization define the state-space data. The LPV system thus generated can work as a proxy for the original model for facilitating faster simulations and control system design. For more information, see [Linear Parameter-Varying Models](#).

The LPV System block accepts the state-space matrices and offsets over a grid of scheduling parameter values. The state-space matrices must be specified as an array of model objects. The `SamplingGrid` property of the array defines the scheduling parameters for the LPV system. For examples of using this block, see:

- [Using LTI Arrays for Simulating Multi-Mode Dynamics](#)
- [Approximating Nonlinear Behavior using an Array of LTI Systems](#)
- [LPV Approximation of a Boost Converter Model](#)

## **Kalman Filter block for estimating states of linear time-invariant and linear time-varying systems**

Use the Kalman Filter block to estimate the states of linear time-invariant and linear time-varying systems online. The states are estimated as new data becomes available during the operation of the system. The system can be continuous-time or discrete-time. You can generate code for this block using code generation products such as Simulink Coder.

You can access this block from the Control System Toolbox library. For an example of using this block, see [State Estimation Using Time-Varying Kalman Filter](#).

## **AnalysisPoint Control Design Block for Marking Points of Interest for Linear Analysis**

The new `AnalysisPoint` block is a unit-gain Control Design Block that you can insert anywhere in a control system model to mark points of interest for linear analysis and

tuning. Incorporate `AnalysisPoint` blocks into generalized state-space (`genss`) control system models by interconnecting them with numeric LTI models and other Control Design Blocks. When you mark a location in a control system model with an `AnalysisPoint` block, you can use that location for linear analysis tasks, such as extracting responses using `getIOTransfer` or `getLoopTransfer`. You can also use such locations to specify design requirements for control system tuning using `systune` or Control System Tuner (requires Robust Control Toolbox software).

For more information about using `AnalysisPoint` blocks, see:

- [AnalysisPoint reference page](#)
- [Control System with Multi-Channel Analysis Points](#)
- [Managing Signals in Control System Analysis and Design](#)

## Compatibility Considerations

`AnalysisPoint` replaces the `loopswitch` Control Design Block.

Models that contain `loopswitch` blocks continue to work, for backward compatibility. However, it is recommended that you use `AnalysisPoint` blocks in new models. If you have scripts or functions that use `loopswitch` blocks, consider updating them to use `AnalysisPoint` instead.

For documentation of `loopswitch`, see `loopswitch` in the R2014a documentation.

## pidtool function renamed to pidTuner

The `pidtool` function is now called `pidTuner`. To open PID Tuner, use the `pidTuner` command or, in the MATLAB desktop **Apps** tab, click **PID Tuner**.

Using `pidtool` does not generate an error in this release, but the function may be removed in a future release.

## Compatibility Considerations

If you have scripts that use `pidtool`, consider replacing those calls with `pidTuner`.



---

## getSwitches function renamed to getPoints

The `getSwitches` function is now called `getPoints` to match the renaming of `loopswitch` to `AnalysisPoint`. Using `getSwitches` does not generate an error in this release, but the function may be removed in a future release.

## Compatibility Considerations

If you have scripts or functions that use `getSwitches`, consider replacing those calls with `getPoints`.

## Functionality being removed or changed

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
<code>loopswitch</code> Control Design Block	Still works	<code>AnalysisPoint</code>	Consider replacing <code>loopswitch</code> with <code>AnalysisPoint</code> in scripts and functions.
<code>getSwitches</code> function	Returns <code>loopswitch</code> and <code>AnalysisPoint</code> blocks in model	<code>getPoints</code>	Consider replacing <code>getSwitches</code> with <code>getPoints</code> in scripts and functions.
<code>pidtool</code> function	Still works	<code>pidTuner</code>	Consider replacing <code>pidtool</code> with <code>pidTuner</code> in scripts.



# R2014a

**Version: 9.7**

**New Features**

**Bug Fixes**

**Compatibility Considerations**

## Redesigned PID Tuner app for improved PID tuning workflow

The redesigned PID Tuner streamlines workflows for interactively tuning PID controllers for reference tracking and disturbance rejection.

To access the PID Tuner, use the `pidtool` command. For example, to tune a PI controller for an LTI model, `G`:

```
pidtool(G, 'PI')
```

For more information about the PID Tuner, see [Designing PID Controllers with the PID Tuner](#).

## PID controller tuning using system identification to model the plant from measured input-output data in the PID Tuner app (with System Identification Toolbox)

If you have System Identification Toolbox™ software, you can use PID Tuner to fit a linear model to the measured SISO response data from your system and tune a PID controller for the resulting model. For example, if you want to design a PID controller for a manufacturing process, you can start with response data from a bump test on your system.

PID Tuner uses system identification to estimate an LTI model from the response data. You can interactively adjust the identified parameters to obtain an LTI model with a response that fits your response data. PID Tuner automatically tunes a PID controller for the estimated model. You can then interactively adjust the performance of the tuned control system, and save the estimated plant and tuned controller.

For an example, see [Interactively Estimate Plant Parameters from Response Data](#).

## freqsep function for decomposing a linear system into fast dynamics and slow dynamics

Use the new `freqsep` command for separating numeric LTI models into fast and slow components. `freqsep` allows you to specify the cutoff frequency about which the model is decomposed. The slow component contains poles with natural frequency below the cutoff frequency. The fast component contains poles at or above the cutoff.

For more information, see the [freqsep](#) reference page.

---

## damp command display includes time constant information

When you call the `damp` command with no output arguments, the display now includes the time constant for each pole. The time constant is calculated as follows:

$$\tau = \frac{1}{\omega_n \zeta}.$$

$\omega_n$  is the natural frequency of the pole, and  $\zeta$  is its damping ratio.

## Compatibility Considerations

For a discrete-time system with unspecified sample time (`Ts = -1`), `damp` now calculates the natural frequency and damping ratio by assuming `Ts = 1`. Previously, the software returned `[]` for the natural frequency and damping ratio of such systems.

`damp` returns outputs in order of increasing natural frequency. Therefore, this change can result in reordered poles for systems with unspecified sample times.

For more information on the outputs, see the `damp` reference page.



# R2013b

**Version: 9.6**

**New Features**

**Bug Fixes**

**Compatibility Considerations**

## SamplingGrid property for tracking dependence of array of sampled models on variable values

In Control System Toolbox, you can derive arrays of numeric or generalized LTI models by sampling one or more independent variables. The new `SamplingGrid` property of LTI models tracks the variable values associated with each model in such an array.

Set this property to a structure whose fields are the names of the sampling variables and contain the sampled variable values associated with each model. All sampling variables should be numeric and scalar valued, and all arrays of sampled values should match the dimensions of the model array.

For example, suppose you create a 11-by-1 array of linear models, `sysarr`, by taking snapshots of a linear time-varying system at times `t = 0:10`. The following code stores the time samples with the linear models.

```
sys.SamplingGrid = struct('time',0:10)
```

For an additional examples, see:

- [Array With Variations in Two Parameters](#)
- [Sample a Tunable \(Parametric\) Model for Parameter Studies](#)

## Option to retain unconnected states when interconnecting models using connect command

By default, the `connect` command discards states that do not contribute to the dynamics in the path between the inputs and outputs of the interconnected system. You can now optionally retain such unconnected states. This option can be useful, for example, when you want to compute the interconnected system response from known initial state values of the components.

To instruct `connect` to retain unconnected states, use the new `connectOptions` command with the existing `connect` command.

For more information, see the `connectOptions` reference page.



---

## **connect command always returns state-space or frequency response data model**

The `connect` command now always returns a state-space model, such as an `ss`, `genss`, or `uss` model, unless one or more of the input models is a frequency response data model. In that case, `connect` returns a frequency response data model, such as an `frd` or `genfrd` model.

For more information, see the `connect` reference page.

## **Compatibility Considerations**

In previous releases, `connect` returned a `tf` or `zpk` model when all input models were `tf` or `zpk` models. Therefore, `connect` might now return state-space models in cases where it previously returned `tf` or `zpk` models.

## **updateSystem command for updating dynamic system data in a response plot**

The new `updateSystem` command replaces the system data used to compute a response plot with data derived from a different dynamic system, and updates the plot. `updateSystem` is useful, for example, to cause a plot in a GUI to update in response to interactive input.

For more information, see:

- `updateSystem` reference page
- Build GUI With Interactive Plot Updates

## **getLoopID renamed to getSwitches**

The `getLoopID` function is now called `getSwitches` to more clearly reflect the purpose of the function. Using `getLoopID` does not generate an error in this release, but the function may be removed in a future release.

## **Compatibility Considerations**

If you have scripts or functions that use `getLoopID`, consider replacing those calls with `getSwitches`.

## **LoopID property of loopswitch renamed to Location**

The LoopID property of the loopswitch model component is now called Location to more clearly reflect the purpose of the property. Using LoopID does not generate an error in this release, but the name may be removed in a future release.

### **Compatibility Considerations**

If you have scripts or functions that use the LoopID property, consider updating your code to use Location instead.

# R2013a


**Version: 9.5**

**New Features**

**Bug Fixes**

## **Transient behavior slider for PID Tuner, increasing control over reference tracking and disturbance rejection performance**

The PID Tuner now has a **Transient behavior** slider for emphasizing either reference tracking or disturbance rejection. When you open the PID Tuner, the tool starts in the **Time domain** design mode, displaying a step plot of the reference tracking response. The new **Transient behavior** slider is beneath the **Response time** slider.

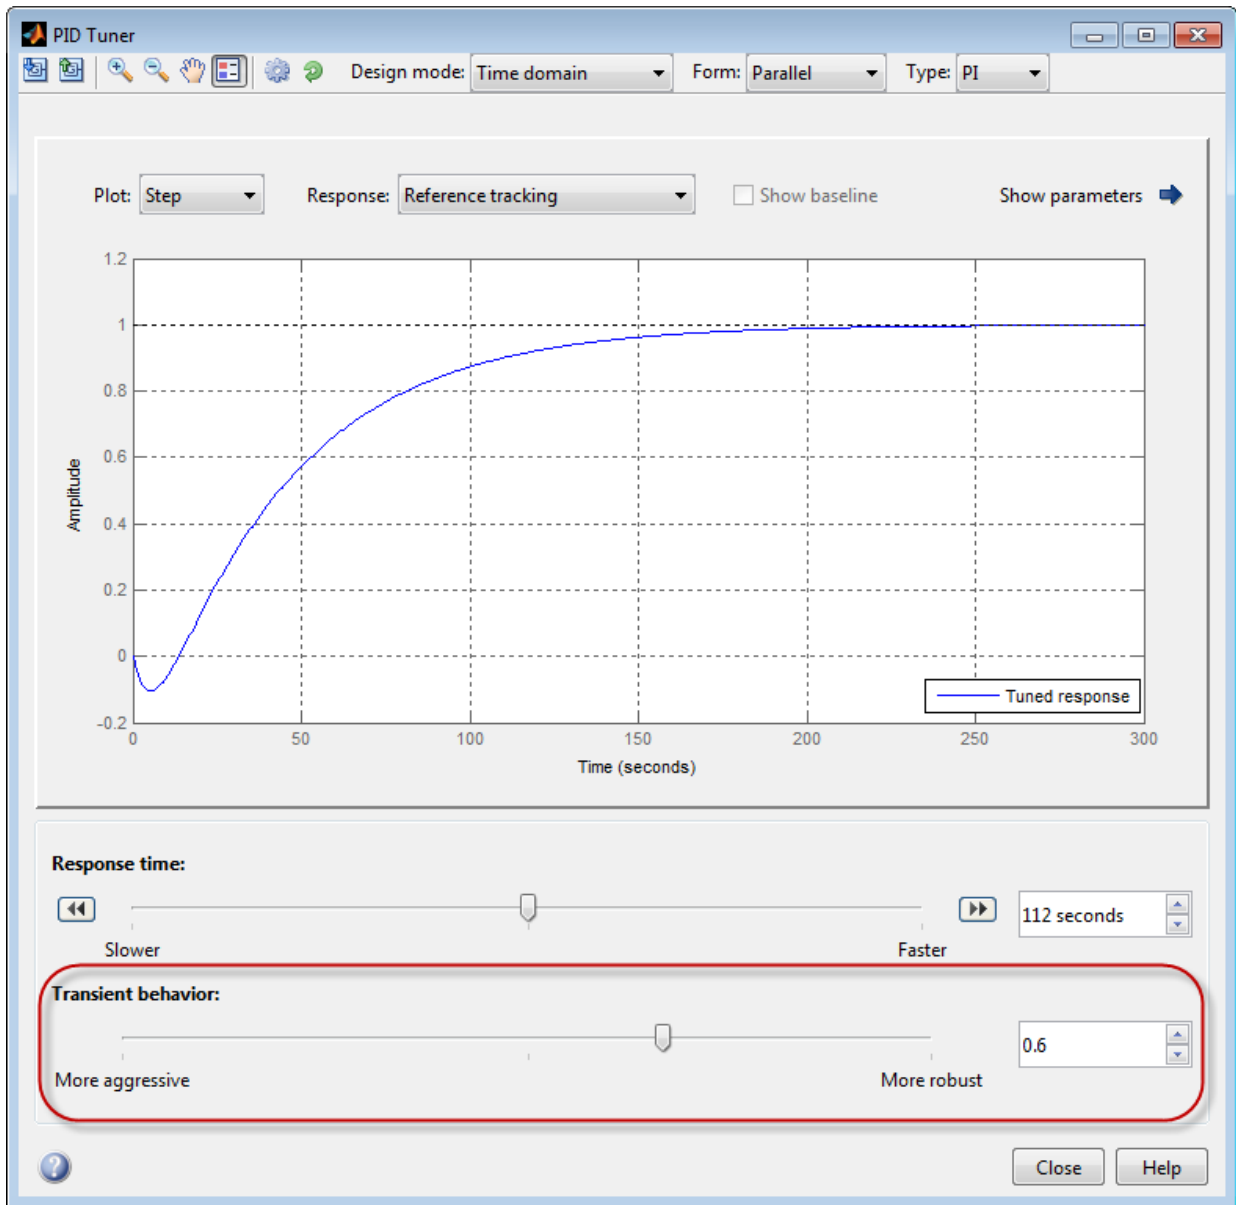

You can use the **Transient behavior** slider when:

- The tuned system's disturbance rejection response is too sluggish for your requirements. In this case, try moving the **Transient behavior** slider to the left to make the controller more aggressive at disturbance rejection.
- The tuned system's reference tracking response has too much overshoot for your requirements. In this case, try moving the **Transient behavior** slider to the right to increase controller robustness and reduce overshoot.

In Frequency domain design mode, the PID Tuner has **Bandwidth** and **Phase margin** sliders. These sliders are the frequency-domain equivalents of the **Response time** and **Transient behavior** sliders, respectively.

# R2012b

**Version: 9.4**

**New Features**

**Bug Fixes**

**Compatibility Considerations**

## **ltiblock.pid2 and loopswitch objects for tuning two-degree-of-freedom PID controllers and marking loop opening sites for open-loop requirements**

New Control Design Blocks allow you to specify more control structures and more types of constraints for fixed-structure control system tuning in MATLAB:

- `ltiblock.pid2` — Tunable two-degree-of-freedom PID controller
- `loopswitch` — Control Design Block for specifying feedback loop opening locations in a tunable `genss` model of a control system

You can use these Control Design Blocks to build control systems for tuning with Robust Control Toolbox tuning commands such as `systune` and `looptune`. For more information, see the `ltiblock.pid2` and `loopswitch` reference pages.

## **Commands for obtaining open-loop responses, closed-loop responses, and current values of tunable components from control system models**

New commands allow you to compute open-loop and closed-loop responses from a Generalized LTI model representing a control system.

- `getLoopTransfer` — Compute point-to-point open-loop response of a Generalized LTI model of a control system, at a loop-opening site defined by a `loopswitch` block. The new command `getLoopID` returns a list of such loop-opening sites.
- `getIOTransfer` — Extract the closed-loop response from a specified input to a specified output of a control system.

These commands are particularly useful for validating the response functions of control systems tuned using Robust Control Toolbox tuning commands such as `systune`.

Additionally, the new `showTunable` command displays the current value of tunable components in a generalized LTI model of a control system. This command is useful for querying tuned parameter values of control systems tuned using Robust Control Toolbox tuning commands such as `systune`.

For more information, see the reference pages for these new commands and the following topics:

- Generalized Models



- 
- Models with Tunable Coefficients

## Option for elementwise operation of model query commands on model arrays

The new 'elem' flag causes elementwise operation on model arrays of the model query commands:

- `hasInternalDelay`
- `hasdelay`
- `isstatic`
- `isreal`
- `isfinite`
- `isproper`
- `isstable`

For example, for an array, `sysarray`, of dynamic system models,

```
B = hasdelay(sysarray, 'elem');
```

returns a logical array, `B` of the same size as `sysarray` indicating whether the corresponding model in `sysarray` contains a time delay. Without the 'elem' flag,

```
B = hasdelay(sysarray);
```

returns a scalar logical value that is equal to 1 if any entry in `sysarray` contains a time delay.

## Compatibility Considerations

`isfinite` and `isstable` now return a scalar logical value when invoked without the 'elem' flag. Previously, `isfinite` and `isstable` returned a logical array by default.

If you have scripts or functions that use `isfinite(sysarray)` or `isstable(sysarray)`, replace those calls with `isfinite(sysarray, 'elem')` or `isstable(sysarray, 'elem')` to perform an elementwise query and obtain a logical array.



# R2012a

**Version: 9.3**

**New Features**

**Compatibility Considerations**

## Frequency Analysis Commands for Calculating Peak Gain and Finding Gain-Crossover Frequencies

Control System Toolbox software includes two new frequency analysis commands:

- `getPeakGain` — Peak gain of frequency response of a dynamic system model
- `getGainCrossover` — Frequencies at which system gain crosses a specified gain level

For more information, see the `getPeakGain` and `getGainCrossover` reference pages.

These functions use the SLICOT library of numerical algorithms. For more information about the SLICOT library, see <http://slicot.org>.

## Specify Target Crossover Frequency as Input to `pidtune`

A new syntax for `pidtune` lets you specify a target crossover frequency directly as an input argument. For example, the following command designs a PI controller, `C`, for a plant model `sys`. The command also specifies a target value `wc` for the 0 dB gain crossover frequency of the open-loop response  $L = \text{sys} * C$ .

```
C = pidtune(sys, 'pi', wc);
```

Previously, you had to use `pidtuneOptions` to specify a target crossover frequency.

For more information, see the `pidtune` reference page.

## Rescaled Impulse Response and Impulse-Invariant Time Domain Conversion

For discrete-time dynamic system models, the input signal applied by `impulse` is now a unit area pulse of length `Ts` and height `1/Ts`. `Ts` is the sampling time of the discrete-time system. Previously, `impulse` applied a pulse of length `Ts` and unit height.

## Compatibility Considerations

Results of this change include:

- The amplitude of the impulse response calculated by `impulse` and `impzplot` is scaled by `1/Ts` relative to previous versions.

- 
- Discretization using the impulse-invariant ('`impulse`') method of `c2d` returns a model that is scaled by `Ts` compared to previous releases. This scaling ensures a close match between the frequency responses of the continuous-time model and the impulse-invariant discretization as `Ts` approaches zero (for strictly proper models). In previous releases, the frequency responses differed by a factor of `Ts`.

## First-Order Hold Method for `d2c`

The `d2c` command now supports the first-order hold (FOH) method for converting a discrete-time dynamic system model to continuous time. The FOH method converts by performing linear interpolation of the inputs, assuming the control inputs are piecewise linear over the sampling period. For more information about using this method, see the `d2c` reference page and Continuous-Discrete Conversion Methods.

## `tzero` Computes Invariant Zeros and Transmission Zeros

The `tzero` command computes the invariant zeros of SISO and MIMO dynamic system models. For minimal realizations, `tzero` computes transmission zeros. `tzero` also returns the normal rank of the transfer function of the system. For more information, see the `tzero` reference page.

## Models Created With System Identification Toolbox Can Be Used Directly With Control System Toolbox Functions

Identified linear models that you create using System Identification Toolbox software can now be used directly with Control System Toolbox analysis and compensator design commands. In prior releases, doing so required conversion to Control System Toolbox LTI model types.

Identified linear models include `idfrd`, `idss`, `idproc`, `idtf`, `idgrey` and `idpoly` models.

Identified linear models can be used directly with:

- Any Control System Toolbox or Robust Control Toolbox functions that operate on dynamic systems, including:
  - Response plots — `nichols`, `margin`, and `rlocus`
  - Model simplification — `pade`, `balred` and `minreal`
  - System interconnections — `series`, `parallel`, `feedback` and `connect`

For a complete list of these functions, enter:

```
methods('DynamicSystem')
```

- Analysis and design tools such as ltiview, sisotool and pidtool.
- The LTI System block in Simulink models.

## Functionality Being Removed or Changed

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
<code>impulse(sys)</code> and <code>impzplot(sys)</code> , for discrete-time <code>sys</code>	Still works.	N/A	Amplitude of response is scaled by $1/T_s$ compared to previous versions. $T_s$ is sampling time of <code>sys</code> .
<code>c2d(sys, Ts, 'impulse')</code>	Still works.	N/A	Resulting discretized model is scaled by $T_s$ compared to previous releases.
<code>[y,t] = impulse(sys, Tfinal)</code> <code>[y,t] = step(sys, Tfinal)</code> <code>[y,t,x] = initial(sys, Tfinal)</code>	For discrete-time <code>sys</code> with undefined sample time ( $T_s = -1$ ), $T_{final}$ is interpreted as the number of sampling periods to simulate.	N/A	Expect the number of simulation data points to be $T_{final} + 1$ instead of $T_{final}$ .

# R2011b

**Version: 9.2**

**New Features**

**Compatibility Considerations**

## Formula-Based Specification of Summing Junctions and Vector Signal Naming for `sumblk` and `connect`

You can now use formula strings to specify the behavior of summing junctions with `sumblk`. For example, to create a summing junction, `S`, that takes the difference between signals `r` and `y` to produce signal `e`, enter the following command:

```
S = sumblk('e = r-y');
```

Additionally, both `sumblk` and `connect` now support vector-based signal naming for interconnecting multi-input, multi-output (MIMO) models. For more information, see the `sumblk` and `connect` reference pages.

## Commands for Interacting with Control Design Blocks in Generalized LTI Models

The following new commands allow you to examine and set the values of Control Design Blocks in Generalized LTI Models:

- `getValue` — Get nominal value of Generalized Model (replaces `getNominal`)
- `setValue` — Modify value of Control Design Block
- `getBlockValue` — Get nominal value of Control Design Block in Generalized Model
- `setBlockValue` — Set value of Control Design Block in Generalized Model
- `showBlockValue` — Display nominal values of Control Design Blocks in Generalized Model

For more information about these commands, see the reference pages for each command.

## Functionality Being Removed or Changed

Functionality	What Happens When You Use This Functionality?	Use This Instead	Compatibility Considerations
<code>delay2z</code>	Errors	<code>absorbDelay</code>	Replace <code>delay2z</code> with <code>absorbDelay</code> .
<code>getNominal</code>	Errors	<code>getValue</code>	Replace <code>getNominal</code> with <code>getValue</code> .



---

<b>Functionality</b>	<b>What Happens When You Use This Functionality?</b>	<b>Use This Instead</b>	<b>Compatibility Considerations</b>
Scale and Info properties of realp parameter	Errors	None	None
<code>sumblk('a','b','c','+-'</code>	Still works	<code>sumblk('a=b-c')</code>	Use new formula-based syntax for sumblk.



# R2011a

**Version: 9.1**

**New Features**

**Compatibility Considerations**

## New Model Objects for Representing Tunable Parameters and Systems with Tunable Components

Control System Toolbox includes new model objects that you can use to represent systems with tunable components. You can use these models for parameter studies or controller synthesis using `hinfstruct` (requires Robust Control Toolbox). The new model types include:

- Control Design Blocks—Parametric components that are the building blocks for constructing tunable models of control systems. Control Design Blocks include:
  - `realp`—Tunable real parameter
  - `Itiblock.gain`—Tunable static gain block
  - `Itiblock.tf`—Fixed-order SISO transfer function with tunable coefficients
  - `Itiblock.ss`—Fixed-order state-space model with tunable coefficients
  - `Itiblock.pid`—One-degree-of-freedom PID controller with tunable coefficients
- Generalized Matrices—Matrices that include parametric (tunable) values. Generalized matrices are `genmat` models.
- Generalized and Uncertain LTI Models—Models representing systems that have both fixed and tunable coefficients. Generalized LTI models include:
  - `genss`—Generalized state-space model
  - `genfrd`—Generalized frequency response data model

These models arise from interconnections between numeric LTI models (such as `tf`, `ss`, or `frd`) and Control Design Blocks. You can also create `genss` models by using the `tf` or `ss` commands with one or more `realp` or `genmat` inputs.

This release also adds new functions for working with generalized models:

- `getNominal`—Nominal value of generalized model
- `replaceBlock`—Replace Control Design Blocks in generalized model
- `nblocks`—Number of blocks in generalized model
- `isParametric`—Determine if model has tunable blocks
- `getLFTModel`—Decompose generalized model

---

For more information about the new model types and about modeling systems that contain tunable coefficients, see the following in the *Control System Toolbox User's Guide*:

- Types of Model Objects
- Models with Tunable Coefficients

## New Time and Frequency Units for Models and Response Plots

All linear model objects now have a `TimeUnit` property for specifying unit of the time variable, time delays in continuous-time models, and sampling time in discrete-time models. The default time units is seconds. You can specify the time units, for example, as hours. See *Specify Model Time Units* for examples.

Frequency-response data ( `frd` and `genfrd`) models also have a new `FrequencyUnit` property for specifying units of the frequency vector. The default frequency units is `rad/TimeUnit`, where `TimeUnit` is the system time units. You can specify the units, for example as KHz, independently of the system time units. See *Specify Frequency Units of Frequency-Response Data Model* for examples. If your code uses the `Units` property of frequency-response data models, it continues to work as before.

See the model reference pages for available time and frequency units options.

Changing the `TimeUnit` and `FrequencyUnit` properties changes the overall system behavior. If you want to simply change the time and frequency units without modifying system behavior, use `chgTimeUnit` and `chgFreqUnit`, respectively.

The time and frequency units of the model appear on the response plots by default. For multiple systems, the units of the first system are used. You can change the units of the time and frequency axes:

- Graphically, using the following editors:
  - Toolbox Preferences Editor
  - LTI Viewer Preferences Editor
  - Graphical Tuning Window Preferences Editor
  - Property Editor of individual plots
- Programmatically, by setting the following properties of plots:
  - `TimeUnits` for time-domain plots using `timeoptions`

- `FreqUnits` for frequency-domain plots using, for example, `bodeoptions`

## Discrete-Time PID Controller Objects Have Stable Derivative Filter Pole

New requirements for creating `pid` and `pidstd` controller objects ensure that the derivative filter pole is always stable.

- For a discrete-time `pid` controller with a derivative filter ( $T_f \neq 0$ ) and `Dformula` set to `'ForwardEuler'`, the sampling time  $T_s$  must be less than  $2 \cdot T_f$ .
- For a discrete-time `pidstd` controller with a derivative filter ( $N \neq \text{Inf}$ ) and `Dformula` set to `'ForwardEuler'`, the sampling time  $T_s$  must be less than  $2 \cdot T_d / N$ .
- The `Trapezoidal` value for `DFormula` is not available for a discrete-time `pid` or `pidstd` controller with no derivative filter ( $T_f = 0$  or  $N = \text{Inf}$ ).

## Compatibility Considerations

On loading `pid` or `pidstd` controllers saved under previous versions, the software changes certain properties of controllers that do not have stable derivative filter poles.

- For a discrete-time `pid` controller with a derivative filter ( $T_f \neq 0$ ), `Dformula` set to `'ForwardEuler'`, and sampling time  $T_s \geq 2 \cdot T_f$ , the derivative filter time is reset to  $T_f = T_s$ .
- For a discrete-time `pidstd` controller with a derivative filter ( $N \neq \text{Inf}$ ), `Dformula` set to `'ForwardEuler'`, the sampling time  $T_s \geq 2 \cdot T_d / N$ , the derivative filter constant is reset to  $N = T_d / T_s$ .
- For a discrete-time `pid` or `pidstd` controller with no derivative filter and `DFormula` = `'Trapezoidal'`, the derivative filter integrator formula is reset to `DFormula` = `'ForwardEuler'`.

The software issues a warning when it changes any of these values. If you receive such a warning, validate your controller to ensure that the new values achieve the desired performance.

## New Variable $q^{-1}$ for Expressing Discrete-Time Transfer Functions

You can now express discrete-time `tf` and `zpk` models in terms of the inverse shift operator  $q^{-1}$ . The variable  $q^{-1}$  is equivalent to  $z^{-1}$ .

---

**Note:** This new definition is consistent with the System Identification Toolbox definition of  $q^{-1}$ .

---

Use the new variable by setting the `Variable` property of a `tf` or `zpk` model to  $q^{-1}$ . For example, entering:

```
H = tf([1 2 3],[5 6 7],0.1,'Variable','q^-1')
```

creates the following discrete-time transfer function:

```
Transfer function:  
1 + 2 q^-1 + 3 q^-2  
-----  
5 + 6 q^-1 + 7 q^-2
```

Sampling time (seconds): 0.1

When you set `Variable` to  $q^{-1}$ , `tf` interprets the numerator and denominator vectors as ascending powers of  $q^{-1}$ .

For more information, see the `tf` and `zpk` reference pages.





# R2010b

**Version: 9.0**

**New Features**

**Compatibility Considerations**

## New Commands and GUI for Modeling and Tuning PID Controllers

This release introduces specialized tools for modeling and designing PID controllers.

### PID Controller Design with the New PID Tuner GUI

The new PID Tuner GUI lets you interactively tune a PID controller for your required response characteristics. Using the GUI, you can adjust and analyze your controller's performance with response plots, such as reference tracking, load disturbance rejection, and controller effort, in both time and frequency domains.

The PID Tuner supports all types of SISO plant models, including:

- Continuous- or discrete-time plant models
- Stable, unstable, or integrating plant models
- Plant models that include I/O time delays or internal time delay

For more information about using PID Tuner, see:

- Designing PID Controllers in the *Control System Toolbox Getting Started Guide*
- The new demo Designing PID for Disturbance Rejection with PID Tuner

### PID Controller Design with the New `pidtune` Command

The new `pidtune` command lets you tune PID controller gains at the command line.

`pidtune` automatically tunes the PID gains to balance performance (response time) and robustness (stability margins). You can specify your own response time and phase margin targets using the new `pidtuneOptions` command.

`pidtune` supports all types of SISO plant models, including:

- Continuous- or discrete-time plant models.
- Stable, unstable, or integrating plant models.
- Plant models that include I/O time delays or internal time delays.
- Arrays of plant models. If `sys` is an array, `pidtune` designs a separate controller for each plant in the array.

For additional information, see:

- The `pidtune` and `pidtuneOptions` reference pages

- 
- The new Control System Toolbox demo Designing Cascade Control System with PI Controllers

### **Modeling PID Controllers in Parallel Form or Standard Form**

The new LTI model objects `pid` and `pidstd` are specialized for modeling PID controllers.

With `pid` and `pidstd` you can model a PID controller directly with the PID parameters, expressed in parallel (`pid`) or standard (`pidstd`) form. The `pid` and `pidstd` commands can also convert to PID form any type of LTI object that represents a PID controller.

Previously, to model a PID controller, you had to derive the controller's equivalent transfer function (or other model), and could not directly store the PID parameters.

For additional information, see the `pid` and `pidstd` reference pages

### **Improved PID Tuning Options in SISO Design Tool**

This release includes improvements to the PID Tuning options in the Automated Tuning pane of SISO Design Tool.

In addition to the Robust Response Time tuning algorithm, SISO Design Tool offers a collection of classical design formulas, including the following:

- Approximate  $M$ -Constrained Integral Gain Optimization (MIGO) Frequency Response
- Approximate MIGO Step Response
- Chien-Hrones-Reswick
- Skogestad Internal Model Control (IMC)
- Ziegler-Nichols Frequency Response
- Ziegler-Nichols Step Response

For information about using SISO Design Tool, see SISO Design Tool in the *Control System Toolbox User's Guide*. For specific information about the automatic PID Tuning options in SISO Design Tool, see PID Tuning in the *Control System Toolbox User's Guide*.

### **Ability to Analyze a Controller Design for Multiple Models Simultaneously in SISO Design Tool**

You can now analyze a controller design for multiple models simultaneously using the SISO Design Tool. This feature helps you analyze whether the controller satisfies design requirements on a system whose exact dynamics are not known and may vary.

System dynamics can vary because of parameter variations or different operating conditions. You represent variations in system dynamics of the plant (G), sensor (H), or both in a feedback structure using arrays of LTI models. Then, design a controller for a nominal model in the array and analyze that the controller satisfies the design requirements on the remaining models using the design and analysis plots. For more information, see:

- Control Design Analysis of Multiple Models in the Control System Toolbox documentation.
- Compensator Design for a Set of Plant Models demo.
- Reference Tracking of a DC Motor with Parameter Variations demo in Simulink Control Design software.

## Change in Output of `repsys` Command

The output of the `repsys` command when called with a single dimension argument has changed.

In prior versions, the output of `repsys(sys, N)` was the same as that of `append(sys, ..., sys)`.

Now, `repsys(sys, N)` returns the same result as `repsys(sys, [N N])`.

The results of other syntaxes for `repsys` have not changed.

See the `repsys` and `append` reference pages for more information.

## Compatibility Considerations

Code that depends upon the previous result of `repsys(sys, N)` no longer returns that result. To obtain the previous result, replace `repsys(sys, N)` with `sys*eye(N)`.

# R2010a

**Version: 8.5**

**New Features**

**Compatibility Considerations**

## Enhanced `c2d` Command to Approximate Fractional Time Delays in Tustin and Matched Discretization Methods

The `c2d` command can now approximate fractional time delays when discretizing linear models with the `tustin` or `matched` methods. The new `c2dOptions` command lets you specify an optional Thiran all-pass filter. The Thiran filter approximates fractional delays for improved phase matching between continuous and discretized models. Previously, `c2d` rounded fractional time delays to the nearest multiple of the sampling time when using the `tustin` or `matched` methods. For more information, see the `c2d` and `c2dOptions` reference pages and Continuous-Discrete Conversion Methods in the *Control System Toolbox User Guide*.

## New Commands for Specifying Options for Continuous-Discrete Conversions

New commands `c2dOptions`, `d2dOptions`, and `d2cOptions` make it easier to specify options for

- Discretization using `c2d`
- Resampling using `d2d`.
- Conversion from discrete to continuous time using `d2c`.

## Compatibility Considerations

This release deprecates the `prewarp` method for `c2d`, `d2d`, and `d2c`. Instead, use `c2dOptions`, `d2dOptions`, or `d2cOptions` to specify the `tustin` method and a `prewarp` frequency. For more information, see Continuous-Discrete Conversion Methods and the `c2d`, `d2d`, and `d2c` reference pages.

## New `FDEL` Command to Remove Specified Data from Frequency Response Data (FRD) Models

You can now remove selected data from `frd` models using the new `fdel` command. For example, use `fdel` to:

- Remove spurious or unneeded data from `frd` models you create from measured frequency response data.

- 
- Remove data at intersecting frequencies from `frd` models before merging them into a single `frd` model with `fcats`, which can only merge `frd` models containing no common frequencies.

For more information, see `fdel` reference page.





# R2009b

**Version: 8.4**

**New Features**

## **Ability to Design Compensators for New Types of Plants**

In the SISO Design Tool, you can now design compensators for plants models that:

- Contain time delays

Previously, you had to approximate delays before designing compensators.

- You specify as frequency-response data (FRD)

For more information on designing compensators using the SISO Design Tool, see SISO Design Tool.

## **New Automated PID Tuning Method**

You can now tune compensators using a new automated PID tuning algorithm called Robust Response Time, which is available in the SISO Design Tool. You specify the open-loop bandwidth and phase margin, and the software computes PID parameters to robustly stabilize your system.

For information on tuning compensators using automated tuning methods, see Automated Tuning.

# R2009a

**Version: 8.3**

**New Features**

**Compatibility Considerations**

## Variable $q$ Now Defined as the Forward Shift Operator $z$

The variable  $q$  is now defined in the standard way as the forward shift operator  $z$ . Previously,  $q$  was defined as  $z^{-1}$ .

---

**Note:** This new definition is consistent with the System Identification Toolbox definition of  $q$ .

---

## Compatibility Considerations

If you use the  $q$  variable, you may receive different results than in previous releases when you:

- Create a transfer function
- Modify the `num` or `den` properties of an existing transfer function

The resulting transfer function differs from previous releases when both the

- `Variable` property is set to  $q$
- `num` and `den` properties have different lengths

For example, the following code:

```
H = tf([1,2],[1 3 8],0.1,'Variable','q')  
now returns the transfer function
```

$$\frac{q+2}{q^2+3q+8} \equiv \frac{z+2}{z^2+3z+8}$$

Previously, the code returned the transfer function

$$\frac{1+2q}{1+3q+8q^2} \equiv \frac{1+2z^{-1}}{1+3z^{-1}+8z^{-2}} \equiv \frac{z^2+2z}{z^2+3z+8}$$

The two transfer functions have different numerators.

# R2008b

**Version: 8.2**

**New Features**

**Compatibility Considerations**

## New Design Tools for Linear-Quadratic-Gaussian (LQG) Servo Controllers with Integral Action

You can now design a Linear-Quadratic-Gaussian (LQG) servo controller for set-point tracking using the new `lqi` and `lqgtrack` commands. This compensator ensures that the system output tracks the reference command and rejects process disturbances and measurement noise.

For more information on forming LQG servo controllers, see [Linear-Quadratic-Gaussian \(LQG\) Design](#), the [lqi](#) reference page, and the [lqgtrack](#) reference page.

### Current Flag Moved from `lqgreg` to `kalman`

The 'current' flag was moved from the `lqgreg` function to the `kalman` function.

## Compatibility Considerations

The following code:

```
kest = kalman(sys,Qn,Rn)
c = lqgreg(kest,k)
```

now returns the current regulator  $u[n] = -K\hat{x}[n|n]$  instead of the delayed regulator  $u[n] = -K\hat{x}[n|n-1]$ .

To update your code to return the same results as in previous releases, use the following code with the added string 'delayed' in the `kalman` command:

```
kest = kalman(sys,Qn,Rn,'delayed')
c = lqgreg(kest,k)
```

For information on using these functions with the current flag in the `kalman` function, see the [kalman](#) and [lqgreg](#) reference pages.

## New Upsampling Method for Rate Conversion in Discrete-Time Models

You can now upsample a discrete-time system to an integer multiple of the original sampling rate without any distortion in the time or frequency domain using the `upsample` command.

---

For more information on upsampling, see the `upsample` reference page and `Upsample a Discrete-Time System` in the *Control System Toolbox User's Guide*.

## **New Scaling Tools to Enhance the Accuracy of Computations with State-Space Models**

You can now scale state-space models to maximize accuracy over the frequency band of interest using the `prescale` command and associated GUI. Use this functionality when you cannot achieve good accuracy at all frequencies and some tradeoff is necessary. A warning alerts you when accuracy may be poor and using prescaling is recommended.

For more information on setting the frequency band for scaling state-space realizations, see `Scaling State-Space Models` and the `prescale` reference page.

## **New Command to Reorder the States of State-Space Models**

You can now reorder the states of state-space models according to a specified permutation using the `xperm` command.

For more information on reordering states, see the `xperm` reference page.

## **Enhanced Support for Customizing Response Plots**

You can now make the following changes to your Control System Toolbox response plots using the figure plotting tools:

- System name
- Line color
- Line style
- Line width
- Marker type

For more information on customizing the appearance of response plots using plot tools, see `Customizing Response Plots Using Plot Tools` in the *Control System Toolbox User's Guide*.





# R2008a

Version: 8.1

New Features

## **Updated Error and Warning Message System**

The Control System Toolbox error and warning IDs and messages have been updated. If you use error and warning IDs in your code, you must update your code to reflect the new IDs.

# R2007b

**Version: 8.0.1**

**New Features**

## Updated and Expanded Demos

The Control System Toolbox demos have been reformatted and expanded to include more examples and content. Demos in the following categories now have new and improved content:

- Getting Started with LTI Models
- Discretization and Sampling Rate Conversions
- How to Get Accurate Results

To open the Control System Toolbox demos, type

```
demo toolbox control
```

at the MATLAB prompt.

# **R2007a**

**Version: 8.0**

**New Features**

## Analysis of Time Delay Systems Now Fully Supported

Control System Toolbox software now lets you:

- Model, simulate, and analyze any interconnection of linear systems with delays, such as systems containing feedback loops with delays.
- Exactly analyze and simulate control systems with long delays. You can evaluate control strategies, such as Smith Predictor and PID control for first-order-plus-dead-time plants.
- Use new commands for modeling state-space models with delays including: `delays`, `getDelayModel`, and `setDelayModel`.

For more information, see the section on Models with Time Delays in the Control System Toolbox documentation.

## New and Updated Automated Tuning Methods

Control System Toolbox software now provides the following new and updated automated tuning methods:

- New Singular Frequency Based Tuning lets you design PID compensators for both stable and unstable plants.
- New H-infinity Loop Shaping lets you find compensators based on a desired open-loop bandwidth or loop shape. This feature requires Robust Control Toolbox software.
- Updated Internal Model Control (IMC) Tuning now supports unstable plants.

For more information, see the section on automated tuning in the Control System Toolbox documentation.

## New Tustin and Prewarp Options for d2d Function

The `d2d` function now includes the following new options for the resampling method:

- `'tustin'`—Performs Bilinear (Tustin) approximation
- `'prewarp'`—Performs Tustin approximation with frequency prewarping

For more information, see the `d2d` reference pages.

# R2006b

Version: 7.1

New Features

## **New Loop Configurations in the SISO Design Tool**

Two new loop configurations are available from the SISO Design Tool. See [Modifying Block Diagram Structure](#) for more information.

## **New Design Requirements**

The LTI Viewer now supports step response and upper/lower time bound design requirements. See [Adding Design Requirements to the LTI Viewer](#) for more information.



# R2006a

Version: 7.0

New Features

## SISO Design Tool

The SISO Design Tool now provides one-click automated tuning using systematic algorithms such as Ziegler-Nichols PID tuning, IMC design, and LQG design. In addition, you can calculate low-order approximations of the IMC/LQG compensators to keep the control system complexity low.

### Compensator Optimization Is Now Supported

If you have installed Simulink Response Optimization™ software, you can now optimize the compensator parameters inside the SISO Design Tool GUI. You can specify time- and frequency-domain requirements on SISO Design Tool plots such as **bode** and **step**, and use numerical optimization algorithms to automatically tune your compensator to meet your requirements. See the Simulink Response Optimization documentation for more details.

### Improved Compensator Editor

The Compensator Editor used to edit the numerical values of poles and zeros has been upgraded to better handle common control components such as lead/lag and notch filters.

### Multi-Loop Compensator Design Support

Many control systems involve multiple feedback loops, some of which are coupled and need joint tuning. The SISO Design Tool now lets you analyze and tune multi-loop configurations. You can focus on a specific loop by opening signals to remove the effects of other loops, gain insight into loop interactions, and jointly tune several SISO loops.

### SISO Design Tool Fully Integrated with the Controls & Estimation Tools Manager

To improve workflow and better leverage other tools, such as Simulink Control Design software and Simulink Response Optimization software, the SISO Design Tool is now fully integrated with the Controls & Estimation Tools Manager (CETM). This provides a signal environment for the design and tuning of compensators.

When you open the SISO Design Tool, the CETM also opens with a SISO Design Task. Many SISO Design Tool features, such as importing models, changing loop configurations, etc., have been moved to the SISO Design Task in CETM. In addition, related tasks such as Simulink based Tuning and Compensator Optimization are seamlessly integrated with the SISO Design Task. See the *Control System Toolbox Getting Started Guide* for details on the new work flow.

---

## LTI Viewer Enhancements

The LTI Viewer now lets you plot the response of a system to user-defined input signals (`lsim`) and initial conditions (`initial`). A new GUI lets you select input signals from a signal generator library, or import signal data from a variety of file formats.

## LTI Objects

### Descriptor and Improper State-Space Models Fully Supported

There is now full support for descriptor state-space models with a singular **E** matrix. This now lets you build state-space representations, such as PID, and manipulate improper models with the superior accuracy of state-space computations. In previous versions, only descriptor models with a nonsingular **E** matrix were supported.

### New Commands to Calculate Time Response Metrics

The new `stepinfo` and `lsiminfo` commands compute time-domain performance metrics, such as rise time, settling time, and overshoot. You can use these commands to write scripts that automatically verify or optimize such performance requirements. Previously, these metrics were available only from response plots.

### Simplified System Interconnections Using I/O Channel Names

The commands `connect`, `feedback`, `series`, `parallel`, and `lft` now let you connect systems by matching names of I/O channels. A helper function, `sumblk`, has also been added to simplify the specification of summing junctions. Altogether this considerably simplifies the task of deriving models for complicated block diagrams. In previous releases, only index-based system connection was supported.

### Changes in the Representation of I/O Delays in State-Space Models

The `ioDelay` property is deprecated from state-space models. Instead, these models have a new property called `InternalDelay` for logging all delays that cannot be pushed to the inputs or outputs. Driving this change is the switch to a representation of delays in terms of delayed differential equations rather than frequency response. See *Models with Time Delays in the Control System Toolbox* documentation for more details on internal delays, and `ss/getdelaymodel` for details on the new internal representation of state-space models with delays.

### **New Name Property for LTI Objects**

This new property lets you attach a name (string) to a given LTI model. The specified name is reflected in response plots.

### **New Commands and Operations for LTI Objects**

The new `exp` command simplifies the creations of continuous-time transfer functions with delays. For more information, type `help lti/exp` at the MATLAB prompt.

The `frd` object has the following new methods:

- `fcats` — Concatenates one or more FRD models along the frequency dimension (data merge).
- `fselect` — Selects frequency points or range in `frd` model.
- `fnorm` — Calculates pointwise peak gain of `frd` model.

The `.*` operation is supported for transfer functions and zero-pole-gain objects. This allows you to perform element-by-element multiplication of MIMO models.

## **Numerical Algorithms**

There have been several major improvements in the Control System Toolbox numerical algorithms, many of which benefit the upgraded SISO Design Tool:

- New scaling algorithm that maximizes accuracy for badly scaled state-space models
- Performance improvement in time and frequency response computations through MEX-files
- More accurate computations of the zero-pole-gain and transfer function representations of a state-space model
- More accurate state-space representations of zero-pole-gain models
- Better handling of nonminimal modes in model reduction commands (`balred`, `balreal`)
- `canon` now computes a block modal form for A matrices that are not diagonalizable or are nearly defective
- Exact phase computation for zero-pole-gain models in `bode` and `nichols`
- Accurate handling of improper models using the descriptor state-space representation

# R14SP3

Version: 6.2.1

No New Features or Changes



# R14SP2

**Version: 6.2**

**New Features**

## Command-Line API for Customizing Plots

The Control System Toolbox software now provides a command-line API for customizing units, labels, limits, and other plot options. You can now change default plot options before generating a plot, or modify plot properties after creation.

For a detailed description of the commands, see the Control System Toolbox documentation.

## Constraint Types for SISO Design

You can now create

- Single piecewise linear constraints for root-locus and Bode plots
- Gain/phase exclusion regions for Nichols plots

Design constraints are displayed as shaded regions.

## Bode and Nichols Plots Have Additional Options

When editing Bode and Nichols plots, you can now

- Set the lower limit of the magnitude manually.
- Adjust the phase offsets by multiples of 360 degrees to facilitate comparing multiple responses.

## Model-Approximation and Order-Reduction Commands

New commands have been added for model approximation and order reduction:

- `hsvd` computes and plots the Hankel singular values.
- `balred` computes low-order approximations using a numerically stable, balancing-free algorithm. You can perform multiple order reductions with a single command.